

RNAV (RNP) Z RWY 4R

NEWARK LIBERTY INTL (EWR)

APP CRS	Rwy Idg	8810
039°	TDZE	11
	Apt Elev	17



RNP AR APCH.

▽ For uncompensated Baro-VNAV systems, procedure NA below -3°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 6000 and RNP 0.30 all Cats visibility to 1 3/8 SM.
△ NA *Missed approach requires minimum climb of 317 feet per NM to 700.

ALSF-2

MISSED APPROACH: Climb to 2500 direct CANBO and on track 073° to MOSME and on track 025° to TEB VOR/DME and hold.

D-ATIS	NEW YORK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

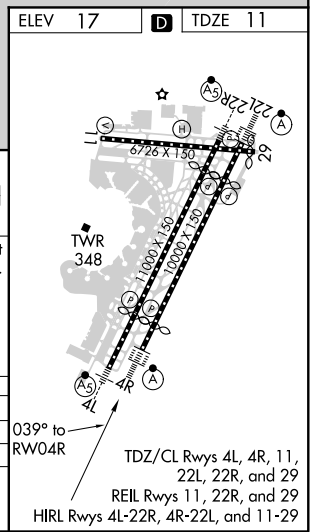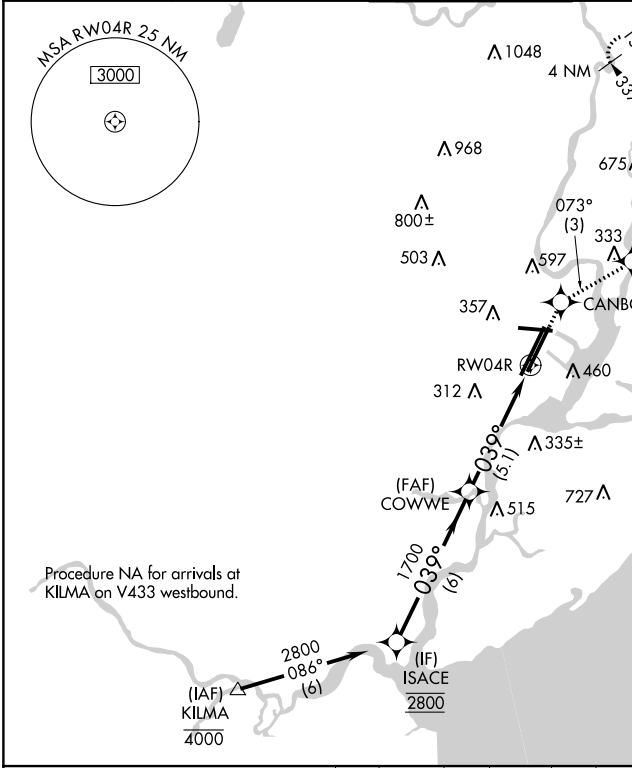

ISACE	2500	CANBO	tr	MOSME	tr	TEB
2800	↑	✧	073°	✧	025°	◻
GP 3.00° TCH 55	VGSi and RNAV glidepath not coincident (VGSi Angle 2.95/TCH 71).					
1700	6 NM		5.1 NM		RW04R	

CATEGORY	A	B	C	D
*RNP 0.15 DA		396/40	385 (400-3/4)	
RNP 0.30 DA		490/60	479 (500-1/4)	

AUTHORIZATION REQUIRED

NE-2, 07 OCT 2021 to 04 NOV 2021

NE-2, 07 OCT 2021 to 04 NOV 2021

RNAV (RNP) Z RWY 4R