RNAV (GPS) RWY 10L

NIAGARA FALLS INTL (IAG)

WAAS CH 66034 W10A	APP CRS 120°	Rwy Idg 9126 / TDZE 589 / Apt Elev 592

DME/DME RNP-0.3 NA. VDP NA with Buffalo Niagara Intl altimeter setting. When local altimeter setting not received, use Buffalo Niagara Intl altimeter setting and increase all MDA 60 feet. Increase LP Cats C/D and Circling Cats C/D visibility ¼ mile. Rwy 10L helicopter visibility reduction below ¾ SM NA. Rwy 6, 10R, 24, 28L helicopter visibility reduction below 1 SM NA. Circling Rwy 6, 10R, 24, 28L NA at night.

MISSED APPROACH: Climb to 1100 then climbing left turn to 3600 direct DIONE and hold.

ATIS	BUFFALO APP CON	NIAGARA TOWER ★	GND CON	CLNC DEL	UNICOM
120.8 269.4	126.5 317.6	118.5 (CTAF) L 349.0	125.3 275.8	119.25 251.1	122.95

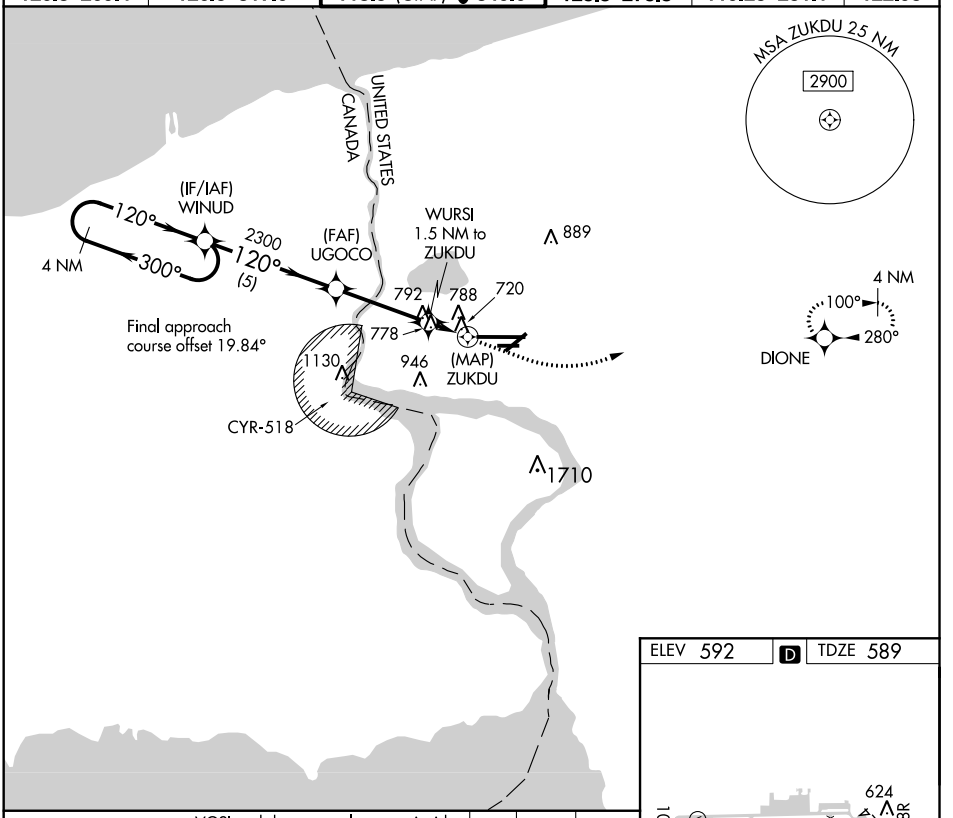

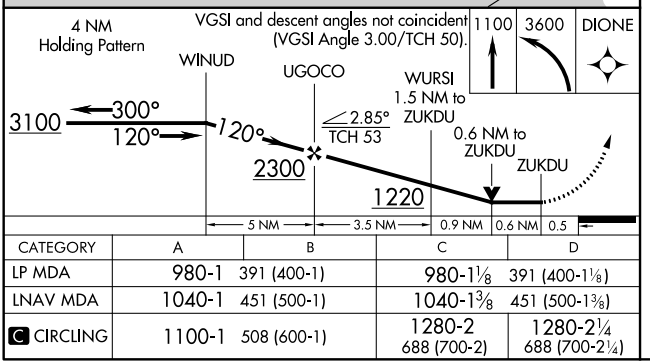

CATEGORY	A	B	C	D
LP MDA	980-1	391 (400-1)	980-1⅛	391 (400-1⅛)
LNAV MDA	1040-1	451 (500-1)	1040-1⅜	451 (500-1⅜)
C CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)

ELEV 592 D TDZE 589

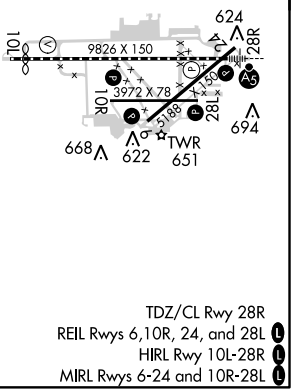

TDZ/CL Rwy 28R
REIL Rwys 6,10R, 24, and 28L L
HIRL Rwy 10L-28R L
MIRL Rwys 6-24 and 10R-28L L

NE-2, 04 NOV 2021 to 02 DEC 2021
NE-2, 04 NOV 2021 to 02 DEC 2021