

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 90132 W06A | APP CRS 060° | Rwy ldg TDZE Apt Elev | 5188 586 592 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 6


NIAGARA FALLS INTL (IAG)

RNP APCH.



Baro-VNAV NA when using Buffalo Niagara Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). When local altimeter setting not received, use Buffalo Niagara Intl altimeter setting and increase all DA 51 feet and all MDA 60 feet, increase LNAV Cat C and D visibility 1/8 SM and Circling Cat C and D 1/4 SM. Rwy 6, 10R, 24, 28L helicopter visibility reduction below 1 SM NA. Straight-in Rwy 6 NA at night, Circling Rwy 6, 10R, 24, 28L NA at night.

MISSED APPROACH: Climb to 3600 direct ZUPOV and hold.

| | | | | | |
|----------------------------|---------------------------------------|---|-------------------------------|---------------------------------|-------------------------|
| ATIS 120.8 269.4 | BUFFALO APP CON 126.5 317.6 | NIAGARA TOWER* 118.5 (CTAF) 0 349.0 | GND CON 125.3 275.8 | CLNC DEL 119.25 251.1 | UNICOM 122.95 |
|----------------------------|---------------------------------------|---|-------------------------------|---------------------------------|-------------------------|

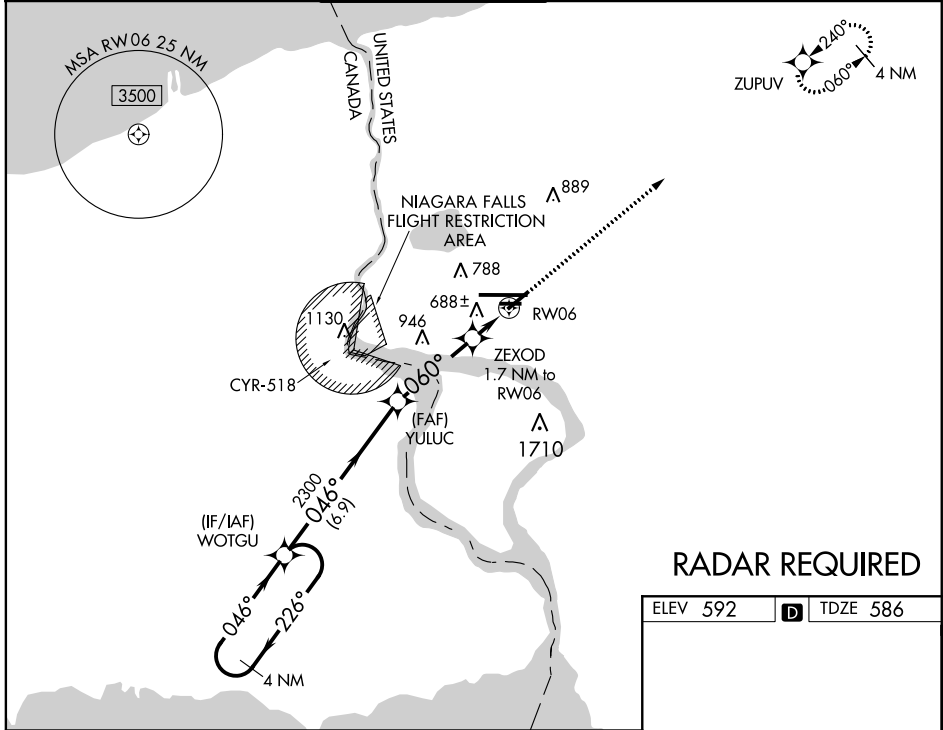

RADAR REQUIRED

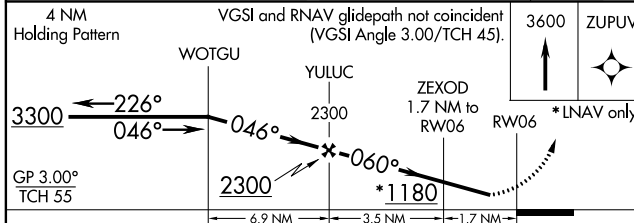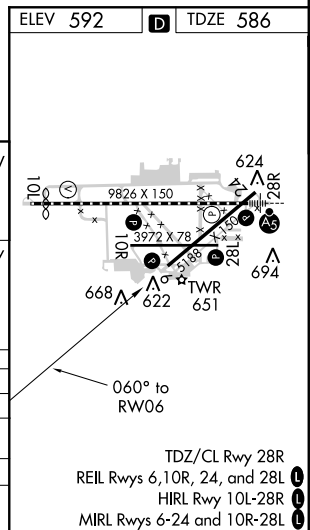

| CATEGORY | A | B | C | D |
|-------------------|--------------------|-------|--------------------|----------------------------|
| LPV DA | | 864-1 | 278 (300-1) | |
| LNAV/VNAV DA | | 849-1 | 263 (300-1) | |
| LNAV MDA | | 940-1 | 354 (400-1) | |
| C CIRCLING | 1100-1 508 (600-1) | | 1280-2 688 (700-2) | 1280-2 1/4 688 (700-2 1/4) |

NE-2, 04 NOV 2021 to 02 DEC 2021

NE-2, 04 NOV 2021 to 02 DEC 2021