RNAV (GPS) RWY 18R

LAREDO INTL (LRD)

WAAS	APP CRS	Rwy Idg	8743
Ch 82599	178°	TDZE	504
W18A		Apt Elev	508

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). Circling NA West of Rwys 14 and 36L. DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to ¾ SM, LNAV/VNAV all Cats visibility to ⅞ SM, and LNAV Cats C/D/E to 1 SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2500 direct ELKOS and hold.

ATIS	HOUSTON CENTER	LAREDO TOWER*	GND CON	UNICOM
125.775	127.8 307.2	120.1(CTAF)(L) 257.9	121.8	122.95

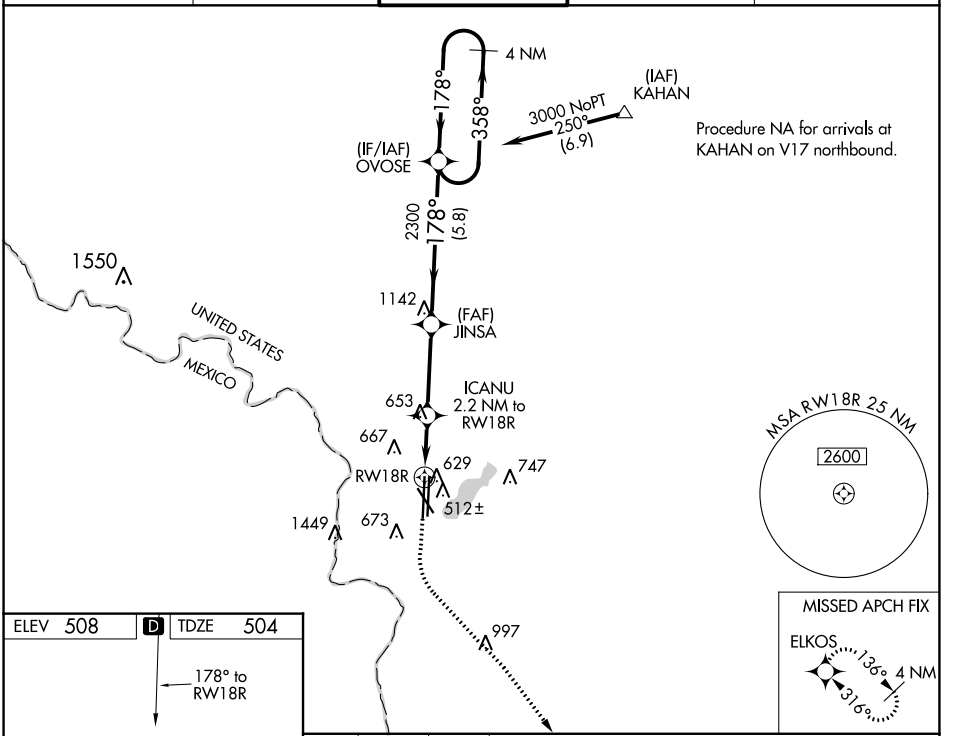

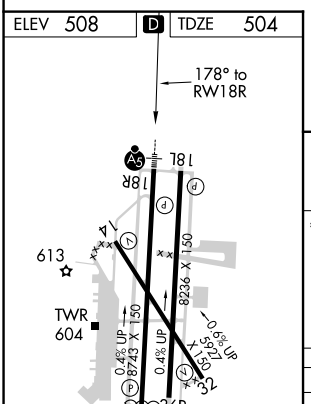

MIRL Rwy 14-32
HIRL Rwys 18R-36L and 18L-36R

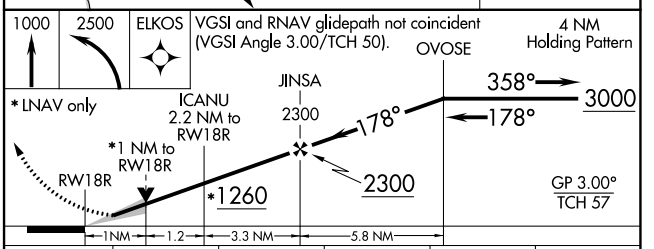

CATEGORY	A	B	C	D	E
LPV DA	704-½ 200 (200-½)				
LNAV/VNAV DA	810-½ 306 (400-½)				
LNAV MDA	880-½ 376 (400-½)		880-⅝ 376 (400-⅝)		
C CIRCLING	940-1 432 (500-1)	980-1 472 (500-1)	1100-1½ 592 (600-1½)	1200-2¼ 692 (700-2¼)	1200-2½ 692 (700-2½)

SC-3, 30 DEC 2021 to 27 JAN 2022
SC-3, 30 DEC 2021 to 27 JAN 2022