RNAV (GPS) Y RWY 35L

LOUISVILLE MUHAMMAD ALI INTL (SDF)

WAAS	APP CRS	Rwy Idg	10000
CH 86203	350°	TDZE	464
W35A		Apt Elev	501

RNP APCH.

Circling Rwy 11 NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1½ SM.

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct DAMEN and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL	CPDLC
118.725	132.075 327.0	124.2 257.8	121.7 348.6	126.1 275.8	

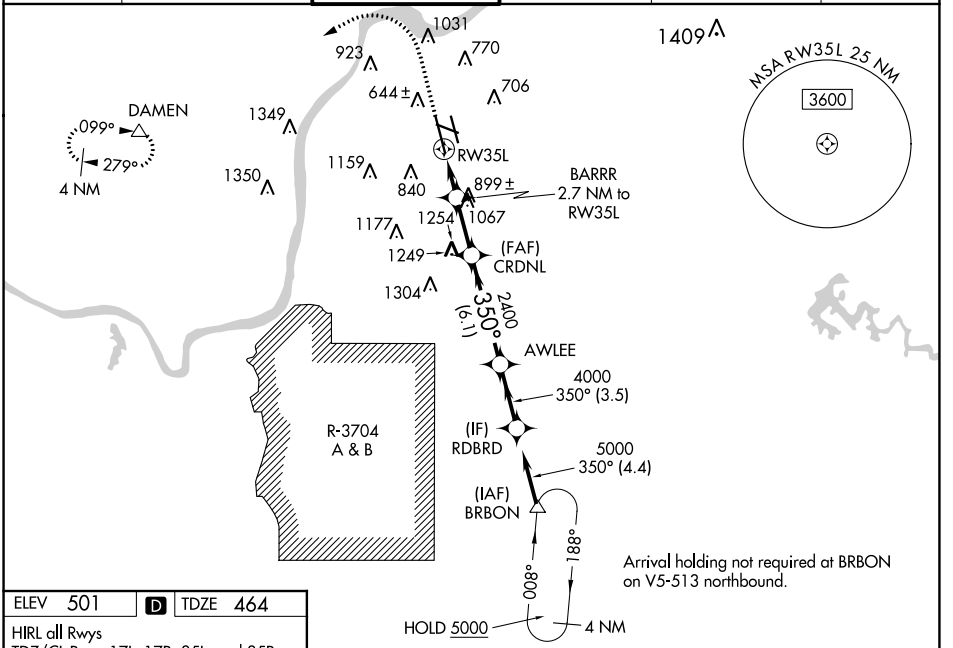

ELEV 501 D TDZE 464

HIRL all Rwys
TDZ/CL Rwys 17L, 17R, 35L, and 35R

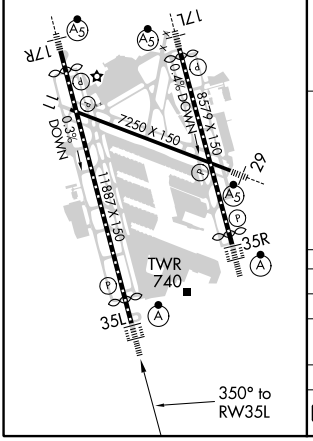

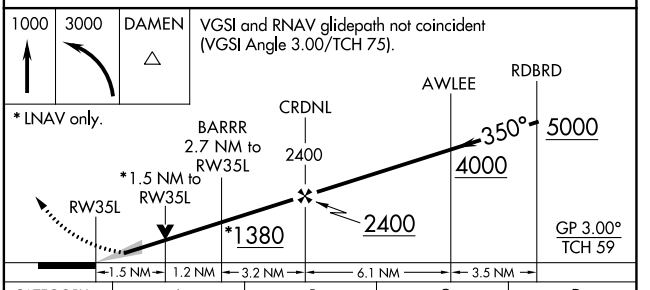

CATEGORY	A	B	C	D
LPV DA	664/18 200 (200-½)			
LNAV/VNAV DA	904/50 440 (500-1)			
LNAV MDA	1000/24 536 (500-½)		1000/55 536 (500-1)	
C CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

SE-1, 30 DEC 2021 to 27 JAN 2022
SE-1, 30 DEC 2021 to 27 JAN 2022