RNAV (GPS) RWY 13

KEARNEY RGNL (EAR)

WAAS	APP CRS	Rwy Idg	4498
CH 65631	136°	TDZE	2130
W13A		Apt Elev	2131

RNP APCH.

T A Baro-VNAV and VDP NA when using Holdrege altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. When local altimeter setting not received, use Holdrege altimeter setting: increase LPV DA to 2407 feet and all Cats visibility ⅛ SM; increase LNAV/VNAV DA to 2457 feet and all Cats visibility ⅜ SM and all MDAs 80 feet; increase visibility LNAV and Circling Cat C ⅛ SM.

MISSED APPROACH: Climb to 4300 direct VIGXI and on track 070° to LENIY and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
123.875	119.4 278.8	123.0 (CTAF) L

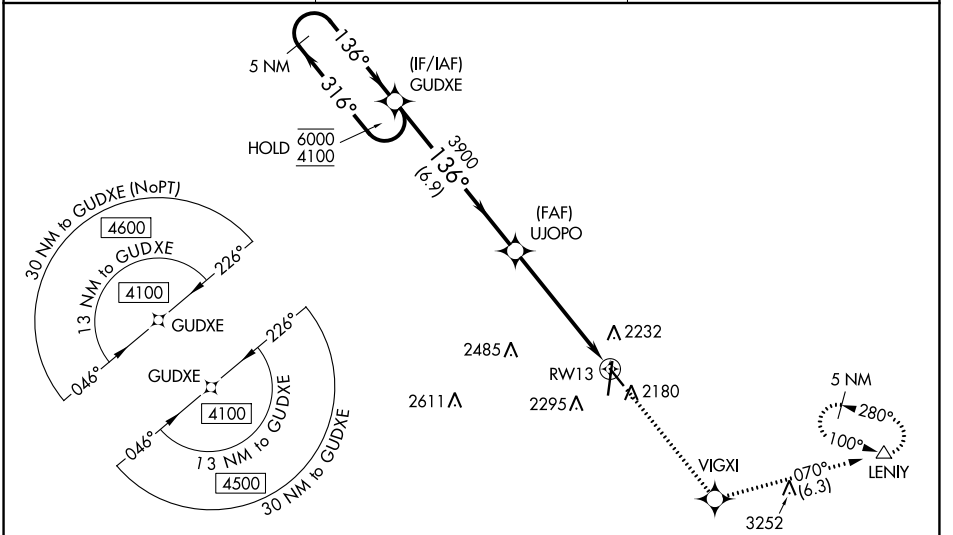

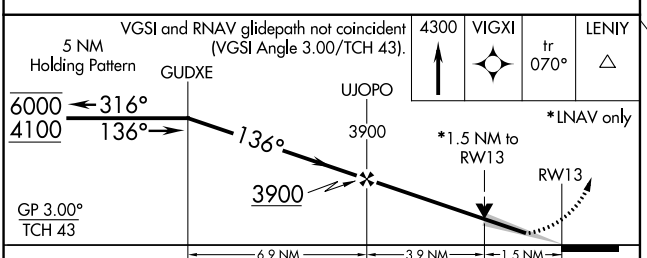

CATEGORY	A	B	C	D
LPV DA	2330-¾ 200 (200-¾)			NA
LNAV/VNAV DA	2380-¾ 250 (300-¾)			NA
LNAV MDA	2720-1 590 (600-1)		2720-1¾ 590 (600-1¾)	NA
C CIRCLING	2720-1 589 (600-1)		2720-1¾ 589 (600-1¾)	NA

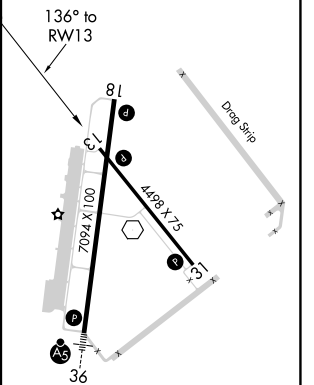

HIRL Rwy 18-36 L
MIRL Rwy 13-31 L
REIL Rwy 18 L

NC-2, 16 JUN 2022 to 14 JUL 2022
NC-2, 16 JUN 2022 to 14 JUL 2022