RNAV (GPS) RWY 10

LAKELAND LINDER INTL (LAL)

WAAS CH 78305 W10A	APP CRS 096°	Rwy Idg 8500 / TDZE 132 / Apt Elev 142

RNP APCH-GPS.

T A Circling NA to Rwys 8 and 26. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 direct PLUMY and hold.

ATIS	TAMPA APP CON	LAKELAND TOWER ★	GND CON	UNICOM
118.025	120.65 290.3	122.95 (CTAF) L 236.775	121.4	122.95

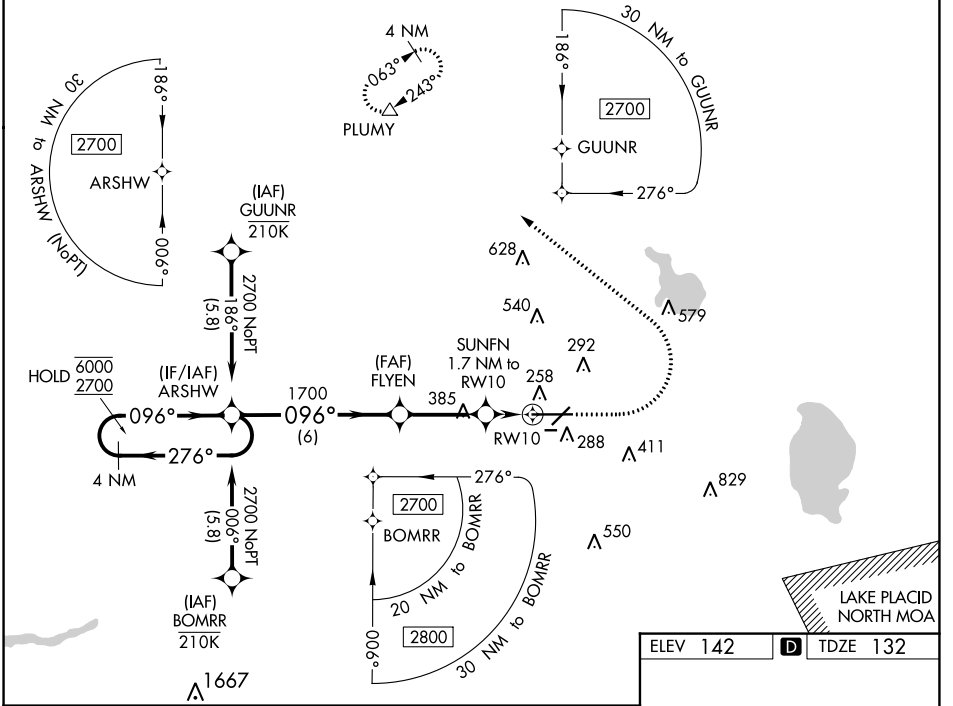

ELEV 142 | D | TDZE 132

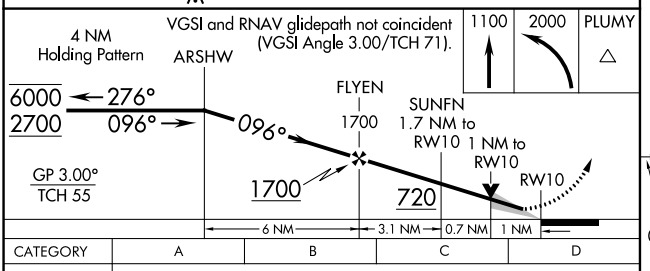



CATEGORY	A	B	C	D
LPV DA	332/18		200 (200-½)	
LNAV/VNAV DA	439/24		307 (300-½)	
LNAV MDA	520/24	388 (400-½)	520/35	388 (400-⅝)
C CIRCLING	600-1 458 (500-1)	660-1 518 (600-1)	720-1½ 578 (600-1½)	840-2¼ 698 (700-2¼)

TDZ/CL Rwy 10
HIRL Rwys 5-23 and 10-28 L

SE-3, 11 AUG 2022 to 08 SEP 2022
SE-3, 11 AUG 2022 to 08 SEP 2022