

LOC/DME I-LFT	APP CRS	Rwy Idg	7659
109.5	216°	TDZE	38
Chan 32		Apt Elev	42

ILS or LOC RWY 22L
LAFAYETTE RGNL/PAUL FOURNET FLD (L.F.T)

⚠ VDP NA with Acadiana Rgnl altimeter setting. When local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase DA to 267 feet; increase all MDA 40 feet and S-LOC 22L visibility Cat C/D to RVR 5000 and Circling visibility Cat C/D ¼ SM. For inop MALSR when using Acadiana Rgnl altimeter setting, increase S-LOC 22L Cat C and D visibility to 1½ mile.
**RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Acadiana Rgnl altimeter setting).

MALSR
A5

MISSED APPROACH:
Climb to 800 then
climbing right turn to
2100 on LFT VORTAC
R-264 to MICRO INT/
LFT 16 DME and hold.

ATIS	LAFAYETTE APP CON *	LAFAYETTE TOWER *	GND CON	CLNC DEL	UNICOM
134.05	121.1 363.0	118.5 (CTAF) 0 257.8	121.8	125.55	122.95

ALTERNATE
MISSED APCH
FIX

LAFFS
375 LF


1242
A

MISSED APCH
FIX

109.8 LFT
R-264
Chan 35

MICRO
LFT 16

114.85 LLA
R-003
Chan 96(V)

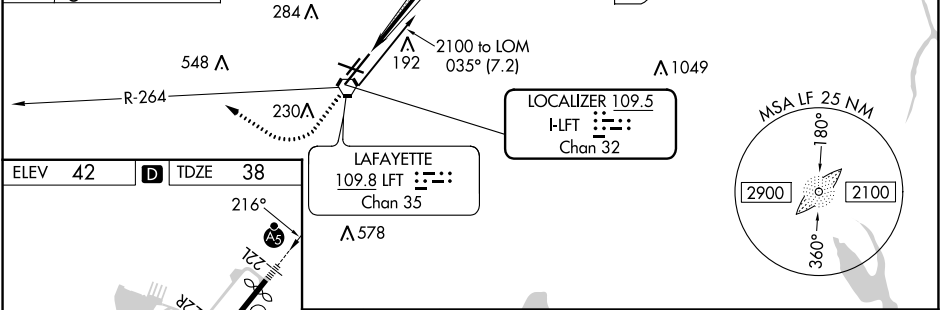

ELEV 42 TDZE 38

REIL Rwy 4L, 4R, 11, 22R and 29
MIRL Rwy 11-29 and 4L-22R
HIRL Rwy 4R-22L

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

800	2100	MICRO	VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 50). Remain within 10 NM	
*LOC only.		*LFT 2.6	1996	036°
I-LFT 1.4		2100	216°	2100
1.2		4.7 NM	2000	GS 3.00° TCH 54
CATEGORY	A	B	C	D
S-ILS 22L**	238/24		200 (200-½)	
S-LOC 22L	480/24	442 (500-½)	480/45	442 (500-¾)
CIRCLING	540-1	580-1	700-1¾	700-2
	498 (500-1)	538 (600-1)	658 (700-1¾)	658 (700-2)