

LOC/DME I-LHM 108.75 Chan 24 (Y)	APP CRS 151°	Rwy Idg 6001 TDZE 121 Apt Elev 121
--	------------------------	---



ILS or LOC RWY 15
LINCOLN RGNL/KARL HARDER FLD (LHM)

⚠ When local altimeter setting not received, use Beale AFB altimeter setting and increase DA to 361 feet and all MDAs 40 feet; increase S-LOC 15 Cat C/D and Circling Cat D visibility ¼ SM. VDP NA with Beale AFB altimeter setting. WIDBO fix minimums: for inop ALS, increase S-LOC 15 Cat D visibility to 1 mile.

MAISR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct MYV VOR/DME and hold.

AWOS-3 124.25	NORCAL APP CON 125.4 259.1	UNICOM 123.0 (CTAF) 1
-------------------------	--------------------------------------	--

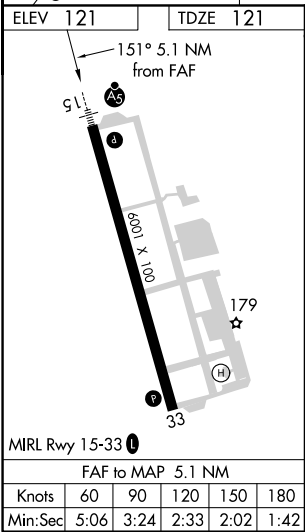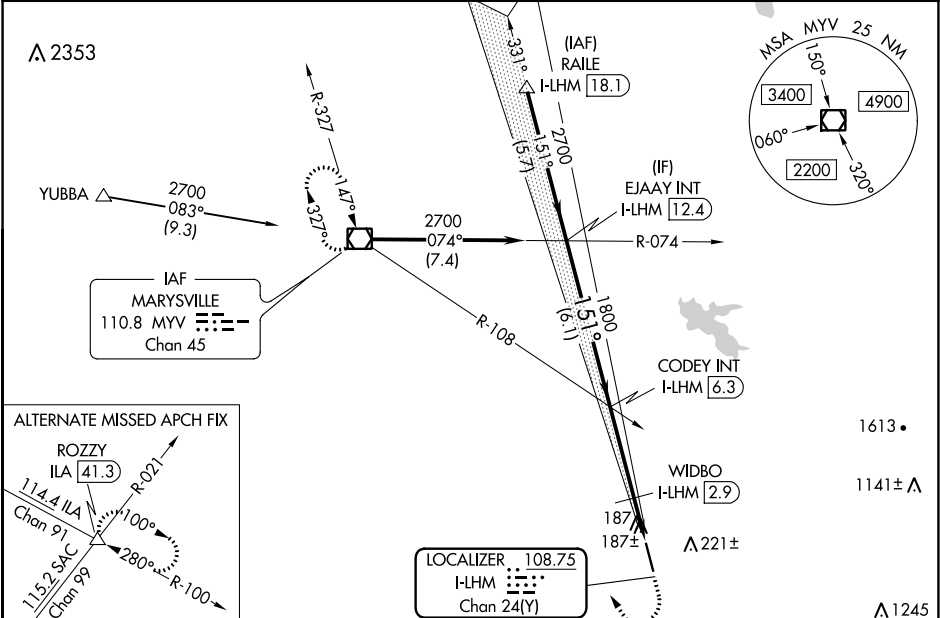

#640 when using Beale AFB altimeter setting.				1200	3000	MYV
EJAAY INT I-LHM 12.4						
CODEY INT I-LHM 6.3						
WIDBO I-LHM 2.9						
2700 151° 1800 1800				* I-LHM 2.1	* LOC only	
GS 3.00° TCH 46						
6.1 NM 3.4 NM 0.8 NM 0.9 NM						
CATEGORY	A	B	C	D		
S-ILS 15	321-½			200 (200-½)		
S-LOC 15	600-½	479 (500-½)	600-¾ 479 (500-¾)	600-1 479 (500-1)		
CIRCLING	600-1	479 (500-1)	600-1½ 479 (500-1½)	760-2 639 (700-2)		
WIDBO FIX MINIMUMS						
S-LOC 15	460-½			339 (400-½)	460-¾ 339 (400-¾)	
CIRCLING	520-1 399 (400-1)	580-1 459 (500-1)	600-1½ 479 (500-1½)	760-2 639 (700-2)		

SW-2, 26 JAN 2023 to 23 FEB 2023

SW-2, 26 JAN 2023 to 23 FEB 2023