


ILS or LOC/DME Y RWY 34

LOC I-OSQ 110.7	APCH CRS 338°	Rwy Idg 11,550 TDZE 660 Arpt Elev 690	AL-371 [USAF]	KELLY FLD (KSKF)
▼ * When ALS inop, increase RVR to 40 and vis to ¾ mile. ** When ALS inop, increase RVR to 55 and vis to 1 mile. *** Circling not authorized E of Rwy 16-34.			ALSF-1 	† MISSED APPROACH: Climb to 2500 via KSY TACAN R-331 until 9 DME, cross 9 DME at 2500, then continue climb to 3000 to IDEEL/12 DME. Expect ATC instructions.
ATIS 120.45 273.5		SAN ANTONIO APP CON 118.05 353.5	TOWER 124.3 322.35	GND CON 121.8 289.4

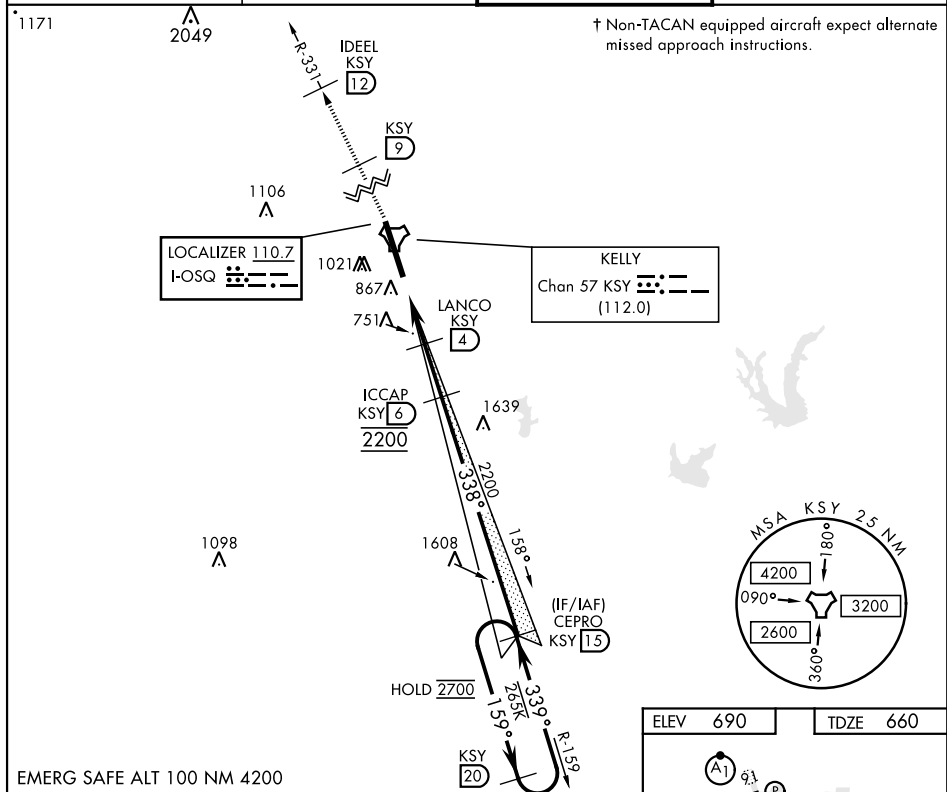

The diagram illustrates the HIRL Rwy 16-34 approach. Key features include:

- Navigation Aids:** TACAN, JETKA (1.9), LANCO (4), ICCAP (6), CEPRO (15), and 2700.
- Distances:** 0.5 NM, 2.1 NM, 2.1 NM, 1100, 2200, 159°, 338°, 339°.
- Angles:** VGS1 and descent angles not coincident. (VGS1 angle 3.02/TCH 93). GS 3.00° TCH 60.
- Category and Altitude:** CATEGORY S-ILS 34*, S-LOC 34**, 860/24, 200, 1020/24, 360, 1020/30, 360, 1200-1, 1280-1, 1340-1¾, 1400-2½, 1900-3.
- Circling:** C CIRCLING***, 510 (600-1), 590 (600-1), 650 (700-1¼), 710 (800-2¼), 1210 (1300-3).