

LOC/DME I-ANE	APP CRS	Rwy Idg
111.15	269°	5000
Chan 48 (Y)		TDZE 910
		Apt Elev 912

ILS or LOC RWY 27

ANOKA COUNTY/BLAINE (JANES FLD) (A.N.E.)

DME required. RADAR required for procedure entry at BLAYN.

▼



⚠

VDP NA when using Crystal altimeter setting. When local altimeter setting not received, use Crystal altimeter setting and increase S-ILS 27 DA to 1131 feet; increase all MDAs 40 feet and S-LOC 27 visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. For inop ALS when using Crystal altimeter setting, increase S-LOC 27 Cat C/D visibility to 1 ½ SM.

MALSR

MISSED APPROACH: Climb to 2700 direct GEP VORTAC and hold, continue climb-in-hold to 2700.

ATIS	MINNEAPOLIS APP CON	ANOKA TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM
120.625	126.5 335.65	132.4 (CTAF) 0	121.85	121.3	121.85 (When twr closed)	122.95

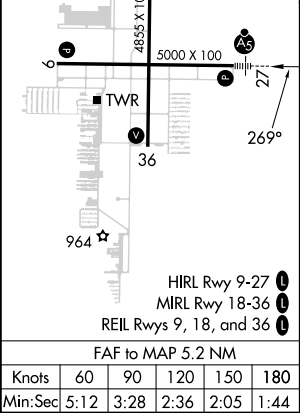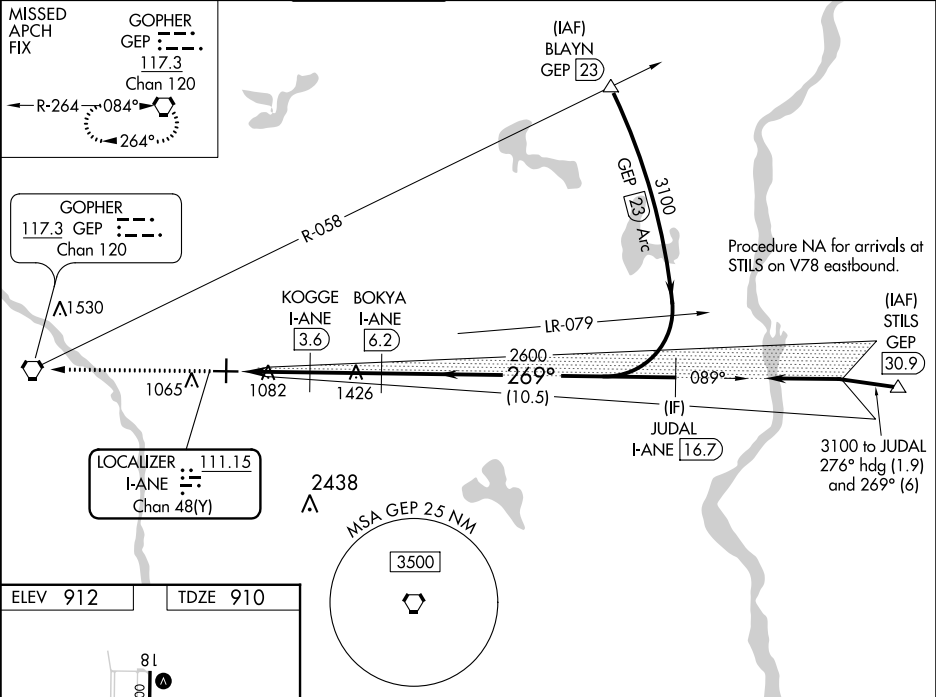

2700

GEP

Use I-ANE DME when on the localizer course.

JUDAL

I-ANE 16.7

GS 3.00°
TCH 49

CATEGORY	A	B	C	D
S-ILS 27	1110-½ 200 (200-½)			
S-LOC 27	1340-½ 430 (500-½)	1340-¾ 430 (500-¾)		
CIRCLING	1400-1 488 (500-1)		1420-1½ 508 (600-1½)	1580-2 668 (700-2)