

WAAS CH 40199 W32A	APP CRS 317°	Rwy Idg TDZE Apt Elev	7701 24 30
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Z RWY 32


JACKSONVILLE INTL (JAX)

▼


For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct OSBAJ and hold.

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC
-------------------------	--	--	-------------------------------	----------------------------------	-------

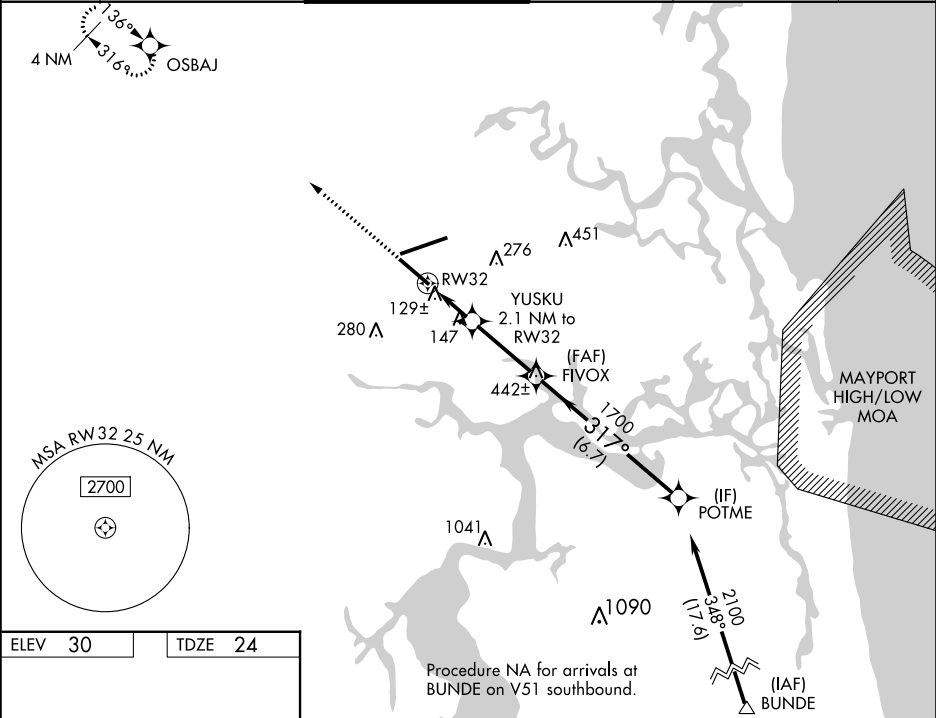

ELEV 30	TDZE 24
---------	---------

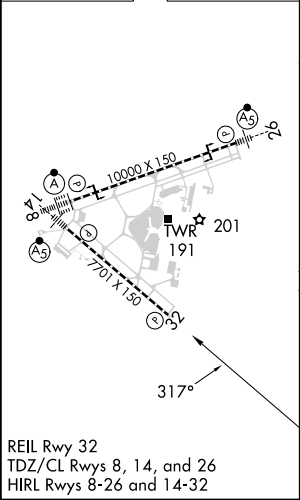

2000 OSBAJ	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 67).			
*LNAV only.	YUSKU 2.1 NM to RW32	FIVOX 1700	POTME 2100	GP 3.00° TCH 50
1 NM 1.1 NM 3 NM 6.7 NM				
CATEGORY	A	B	C	D
LPV DA	336-1 312 (400-1)			
LNAV/VNAV DA	387-1¼ 363 (400-1¼)			
LNAV MDA	400-1 376 (400-1)			
CIRCLING	520-1 490 (500-1)		580-1½ 550 (600-1½)	640-2 610 (700-2)