

WAAS CH 63199 W17A	APP CRS 174°	Rwy Idg TDZE 843 Apt Elev 845	7351 843 845
--	------------------------	---	---

RNAV (GPS) RWY 17R

GRAND FORKS INTL (GFK)



RNP APCH.

Baro-VNAV NA when using Crookston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. VDP NA with Crookston altimeter setting.


MISSED APPROACH: Climb to 2600 direct ERIXE and hold.

When local altimeter setting not received, use Crookston altimeter setting and increase all DA 62 feet and all MDA 80 feet and increase LPV and LNAV/VNAV all Cats visibility $\frac{1}{8}$ SM, LNAV Cats C/D visibility $\frac{1}{8}$ SM, and Circling Cat C visibility $\frac{1}{4}$ SM.

ATIS 119.4	GRAND FORKS APP CON* 118.1 318.1	GRAND FORKS TOWER* 118.4 (CTAF) 0 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95
----------------------	--	--	---------------------------	----------------------------	-------------------------

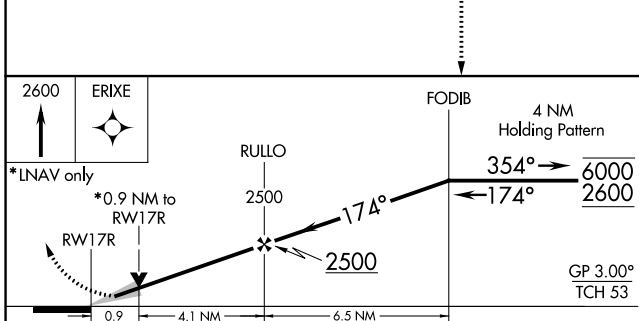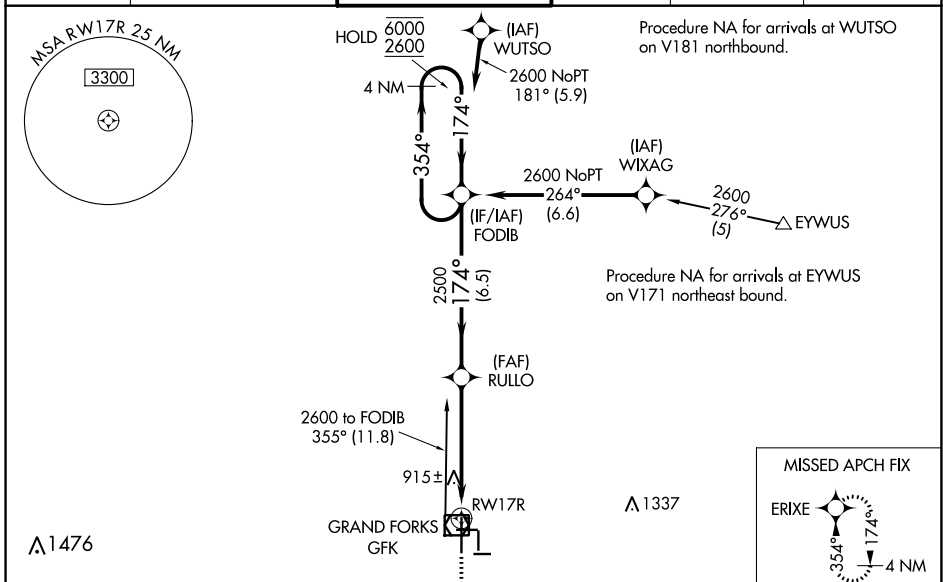

CATEGORY	A	B	C	D
LPV DA		1043- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)	
LNAV/VNAV DA		1093- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)	
LNAV MDA		1180-1	337 (400-1)	
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1 $\frac{1}{2}$ 555 (600-1 $\frac{1}{2}$)	1400-2 555 (600-2)

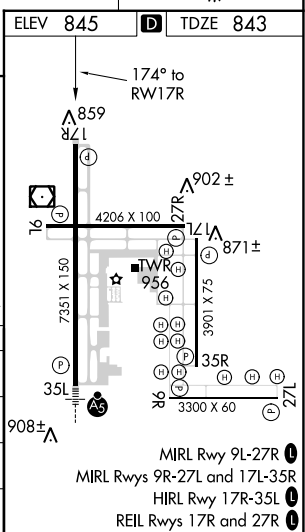

MIRL Rwy 9L-27R
MIRL Rwys 9R-27L and 17L-35R
HIRL Rwy 17R-35L
REIL Rwys 17R and 27R

NC-1, 07 SEP 2023 to 05 OCT 2023

NC-1, 07 SEP 2023 to 05 OCT 2023