

WAAS  
CH **78035**  
**W16B**

APP CRS  
**161°**

Rwy ldg **3715**  
TDZE **186**  
Apt Elev **192**

RNAV (GPS) RWY 16R

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS.


▼

Rwy 16R helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:

Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.

| ATIS    | POTOMAC APP CON | MANASSAS TOWER ★      | GND CON | CLNC DEL | CLNC DEL                |
|---------|-----------------|-----------------------|---------|----------|-------------------------|
| 125.175 | 128.525 306.925 | 133.1 (CTAF) 0 360.75 | 121.8   | 120.2    | 120.2 (When twr closed) |

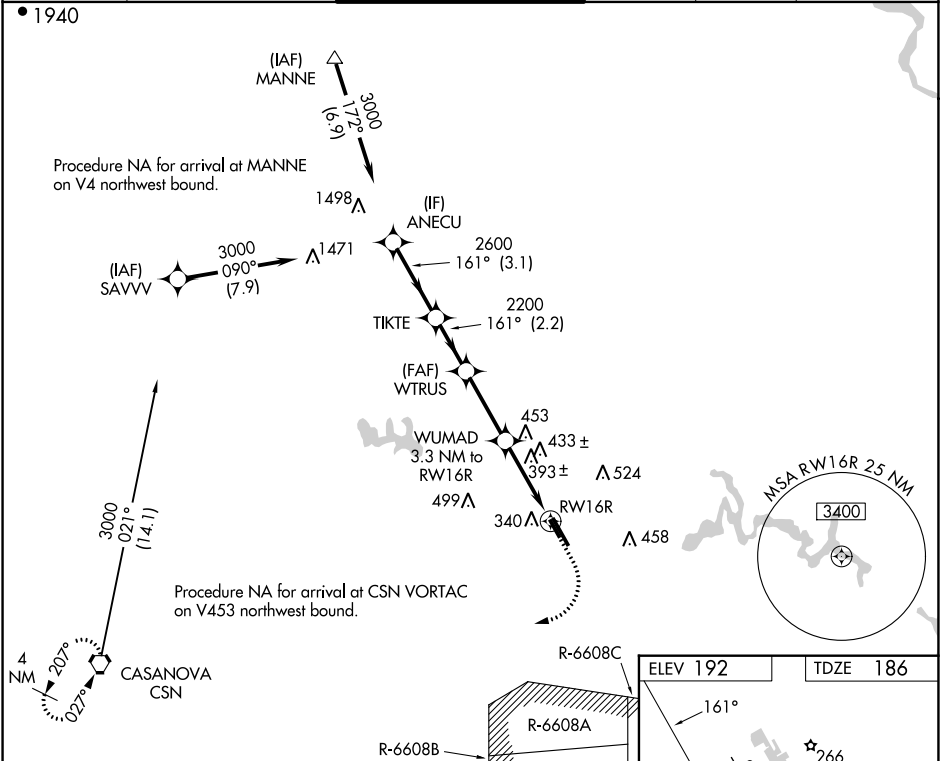

| CATEGORY     |  | A                    |  | B                    |  | C                            |  | D                            |  |
|--------------|--|----------------------|--|----------------------|--|------------------------------|--|------------------------------|--|
| LPV DA       |  |                      |  | 494-7/8              |  | 308 (400-7/8)                |  |                              |  |
| LNAV/VNAV DA |  |                      |  | 675-1 3/8            |  | 489 (500-1 3/8)              |  |                              |  |
| LNAV MDA     |  | 660-1                |  | 474 (500-1)          |  | 660-1 3/8                    |  | 474 (500-1 3/8)              |  |
| CIRCLING     |  | 720-1<br>528 (600-1) |  | 740-1<br>548 (600-1) |  | 840-1 3/4<br>648 (700-1 3/4) |  | 880-2 1/4<br>688 (700-2 1/4) |  |

HIRL Rwy 16L-34R 1

MIRL Rwy 16R-34L 1

REIL Rws 16R and 34L 1