

LOC/DME I-ABI	APP CRS	Rwy Idg	7198
110.3	355°	TDZE	1776
Chan 40		Apt Elev	1791

ILS or LOC RWY 35R

ABILENE RGNL (ABI)

ADF required. RADAR required for procedure entry at NUGEN.



For inop ALS, increase S-ILS 35R Cat E visibility to RVR 4000, and S-LOC 35R Cat C/D/E visibility to 1 $\frac{1}{2}$ SM.

** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3300 then climbing right turn to 4000 direct TOMHI LOM/INT/I-ABI 6.8 DME and hold.

ATIS	ABILENE APP CON	ABILENE TOWER	GND CON
118.25	125.0 338.3 (EAST) 127.2 282.3 (WEST)	120.1 257.8	121.7 348.6

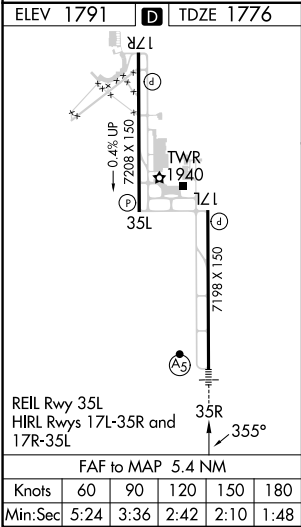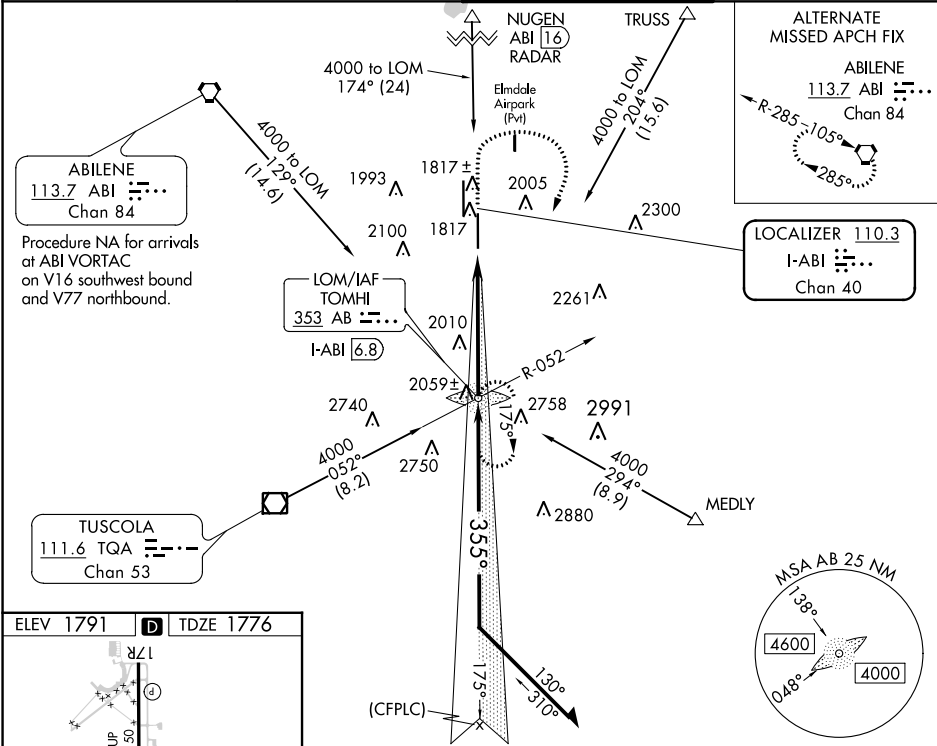

3300

4000

TOMHI

TOMHI LOM/INT

I-ABI 6.8

Remain within 15 NM

*LOC only.

I-ABI 1.4

I-ABI 2.7

3573

175°

4000

355°

3600

GS 3.00°

TCH 58

1.3

4.1 NM

CATEGORY	A	B	C	D	E
S-ILS 35R**	1976/24 200 (200-½)				
S-LOC 35R	2260/24	484 (500-½)	2260/50	484 (500-1)	
CIRCLING	2300-1 509 (600-1)	2320-1 529 (600-1)	2420-1¼ 629 (700-1¼)	2460-2 669 (700-2)	2620-3 829 (900-3)