


ATIS ★ 273.5		RADAR required									
CLNC DEL			Rwy	Knots	60	120	180	240	300	360	
126.7 289.4			04	ⓐ	V/V(fpm)	477	954	1431	1908	2385	2862
GND CON			16	ⓑ	V/V(fpm)	501	1002	1503	2004	2505	3006
127.05 275.8			34	ⓒ	V/V(fpm)	458	916	1374	1832	2290	2748
TOWER ★			Minimum Climb Rate								
119.3 254.4											
DEP CON											
128.1 284.0											
ALBUQUERQUE CENTER											
132.65 257.6				11,929	●	ⓐ	to 11,500				
						ⓑ	to 12,000				

MILITARY USE ONLY

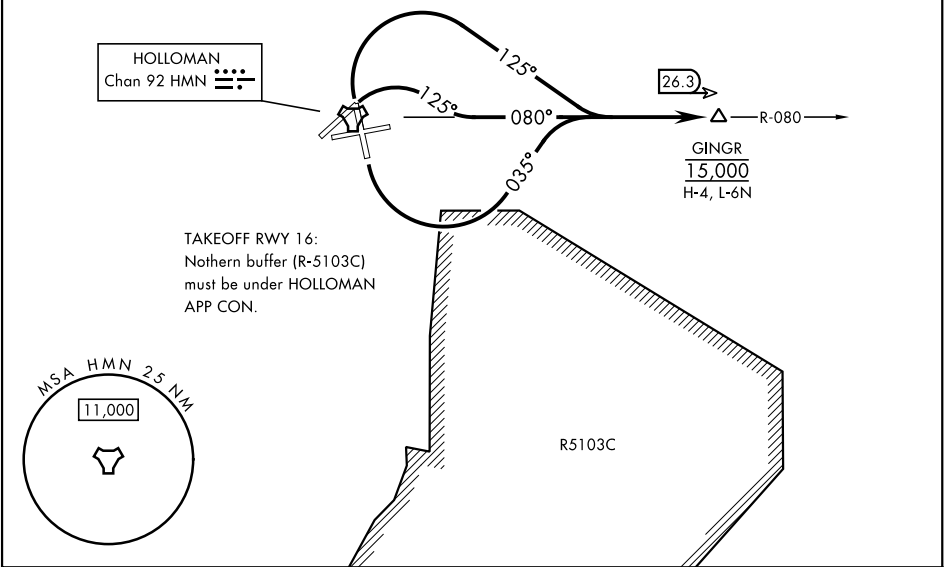

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 4: Climbing right turn to track 125°, intercept HMN R-080 to GINGR. Cross GINGR at 15,000.

TAKEOFF RWY 16: Climbing left turn to track 035°, intercept HMN R-080 to GINGR. Cross GINGR at 15,000.

TAKEOFF RWY 34: Climbing right turn to track 125°, intercept HMN R-080 to GINGR. Cross GINGR at 15,000.