
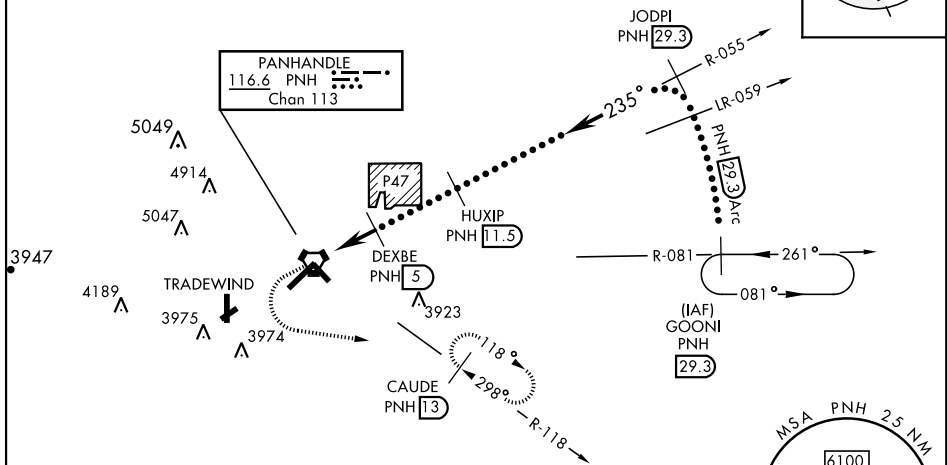


HI-VOR or TACAN RWY 22

VORTAC PNH 116.6 Chan 113	APCH CRS 235°	Rwy Idg 13,502 TDZE 3606 Arpt Elev 3607	AL-19 [USAF]	RICK HUSBAND AMARILLO INTL (KAMA)
DME required. * When ALS inop, increase CAT CDE vis to 1½ SM. ** When ALS inop, increase CAT CDE vis to 1½ SM. ALT MINS N/A when local altimeter not available.			MALSR 	MISSED APPROACH: Climb to 4100 then climbing left turn to 5000 on heading 090° and PNH VORTAC R-118 to CAUDE and hold.

ATIS 118.85 350.3	AMARILLO APP CON 119.5 307.0	AMARILLO TOWER★ 118.3 0 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	ASR
-----------------------------	--	---	-------------------------------	-----------------------------------	-----

When local altimeter setting not received, use Borger altimeter setting.



EMERG SAFE ALT 100 NM 7500

4100

5000

hdg
090°

CLAUDE
PNH 13

VGSI and Descent angles
not coincident

JODPI
R-055
29.3

GOONI
R-081
29.3

VORTAC

UYOMU 0.5

DEXBE 5

5300

6000

14,000

17,000

235°

Arc 29


0.7 NM

4.5 NM

CATEGORY	C	D	E
S-22 *	4000-5⁄8 394 (400-5⁄8)		
CIRCLING	4240-1¾ 633 (700-1¾)	4280-2¼ 673 (700-2¼)	4460-3 853 (900-3)

BORGER ALTIMETER SETTING

S-22 **	4160-1⅛ 554 (600-1⅛)		
CIRCLING	4400-2¼ 793 (800-2¼)	4420-2¾ 813 (900-2¾)	4620-3 1013 (1100-3)

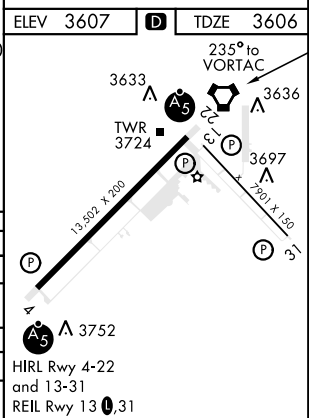

HI-VOR or TACAN RWY 22