

VOR/DME ALW
116.4
Chan **111**

APP CRS
203°

Rwy Idg **6527**
TDZE **1194**
Apt Elev **1194**

VOR RWY 20
WALLA WALLA RGNL (ALW)

ADF required.


NA

For inop ALS, increase JOSBO fix minimums S-20 Cats C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 2300 then climbing right turn to 5100 direct TRINA LOM/ALW 6.7 DME and hold, continue climb-in-hold to 5100.

ASOS 135.875	SPOKANE APP CON★ 133.15 379.15	WALLA WALLA TOWER★ 118.5 (CTAF) 289.4	GND CON 121.6 289.4	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

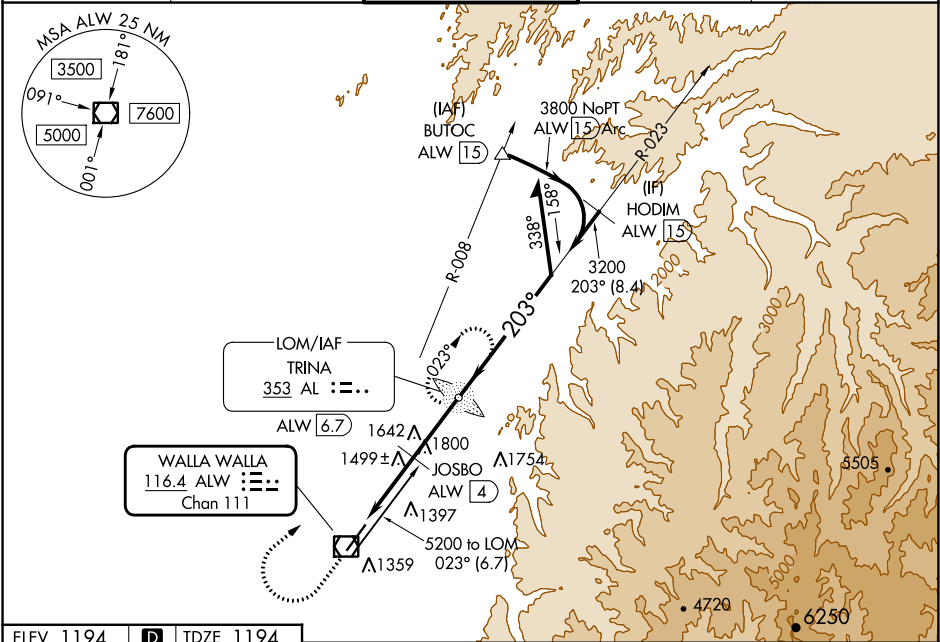

ELEV 1194

D

TDZE 1194

203°

2300

5100

AL

JOSBO ALW 4

TRINA AL LOM ALW 6.7

2140*

3200

4900

023°

203°

2140/40

946 (1000-¾)

2140-2

946 (1000-2)

2140-1¼

946 (1000-1¼)

2140-2¾

946 (1000-2¾)

2300-3

1106 (1200-3)

JOSBO FIX MINIMUMS (DME REQUIRED)

S-20

1760/24

566 (600-½)

1760-1¼

566 (600-1¼)

CIRCLING

1760-1

566 (600-1)

1820-1

626 (700-1)

2120-2¾

926 (1000-2¾)

2300-3

1106 (1200-3)

REIL Rwy 20

HIRL Rwy 2-20