



ILS or LOC RWY 23

LOC I-RSM 109.5	APCH CRS 226°	Rwy Idg 12,501 TDZE 799 Arpt Elev 811	AL-470 [USAF]	GRISSEM ARB (KGUS)
RADAR, TACAN required. * When ALS inop, increase RVR to 40 and vis to ¾ mile. ** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1¾ miles.			ALSF-1 	MISSED APPROACH: Climb to 3000 on the GUS VORTAC R-232 to BURLI and hold. Missed approach requires use of RNAV or ATC RADAR monitoring.

ATIS 108.45 270.8	APP CON 121.05 338.275 123.85 291.675	EAST WEST	TOWER ★ 133.7 290.45	GND CON 128.425 275.8	CLNC DEL 128.425 275.8
----------------------	---	--------------	-------------------------	--------------------------	---------------------------

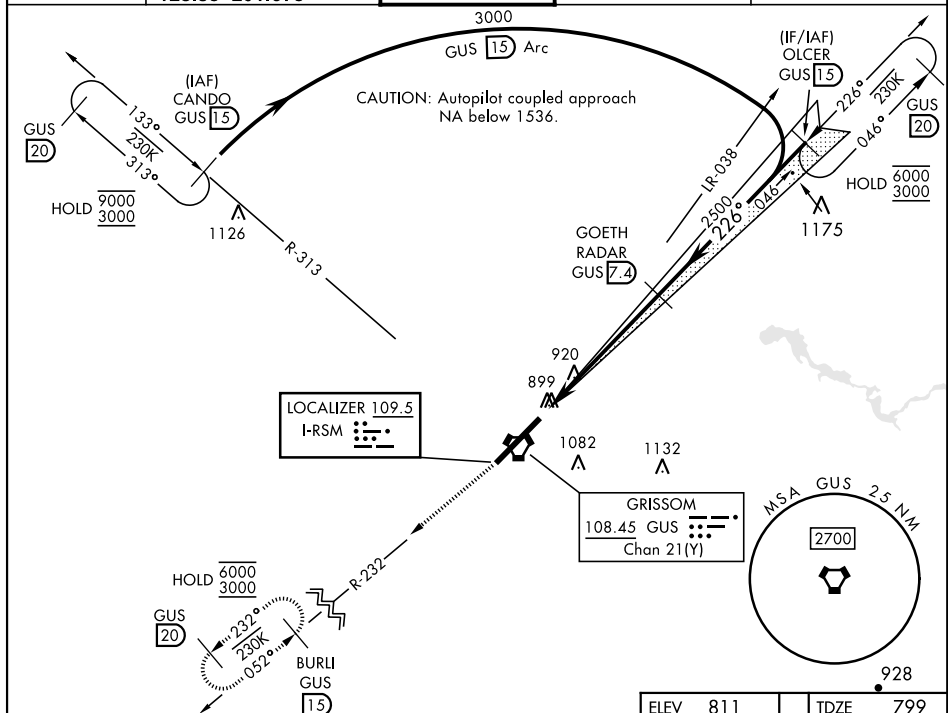

EMERG SAFE ALT 100 NM 3500

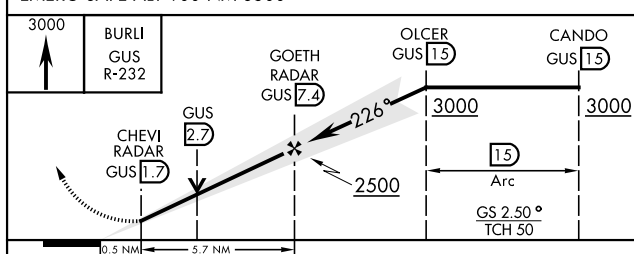

CATEGORY	A	B	C	D	E
S-ILS 23*	999/24		200	(200-½)	
S-LOC 23**	1260/24	461 (500-½)	1260/50	461	(500-1)
C CIRCLING	1340-1	529 (600-1)	1400-1½ 589 (600-1½)	1400-2 589 (600-2)	1440-2½ 629 (700-2½)

