


WAAS CH 97518 W25A	APP CRS 256°	Rwy Idg TDZE Apt Elev	6248 5507 5507
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25
FOUR CORNERS RGNL (FMN)

RNP APCH-GPS.		MISSED APPROACH: Climb to 8000 direct HASIT and hold.
▼ ▲	Baro-VNAV and VDP NA when using Durango altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase LPV DA to 5950 feet and all visibilities ¾ SM. Increase LNAV/VNAV DA to 6312 feet and all visibilities ¾ SM. Increase all MDAs 260 feet and LNAV visibilities Cat C/D ¾ SM, and Circling visibility Cat B ¼ SM and Cat C ½ SM.	

ATIS 127.15	DENVER CENTER 118.575 348.7	FARMINGTON TOWER ★ 118.9 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	---------------------------------------	---	-------------------------	-------------------------

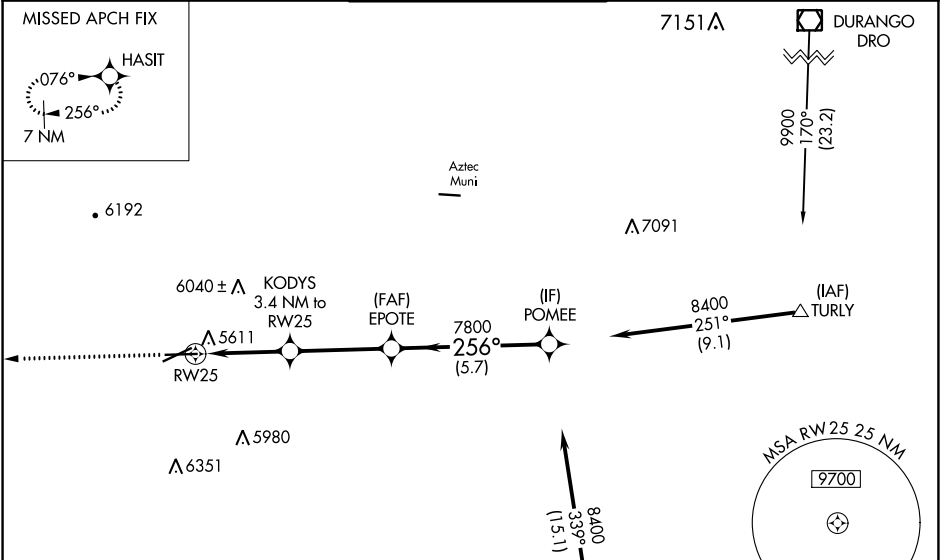

ELEV 5507	D	TDZE 5507
-----------	---	-----------

