


LOC/DME I-EVV 109.9 Chan 36	APP CRS 221°	Rwy Idg TDZE 422 Apt Elev 422	8021
---	------------------------	---	-------------

ILS or LOC RWY 22
EVANSVILLE RGNL (E V V)

RADAR or DME required for procedure entry at AUGUS.				MALSR 	MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.
Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.					

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 126.6	UNICOM 122.95
----------------------	--	---	-------------------------	--------------------------	-------------------------

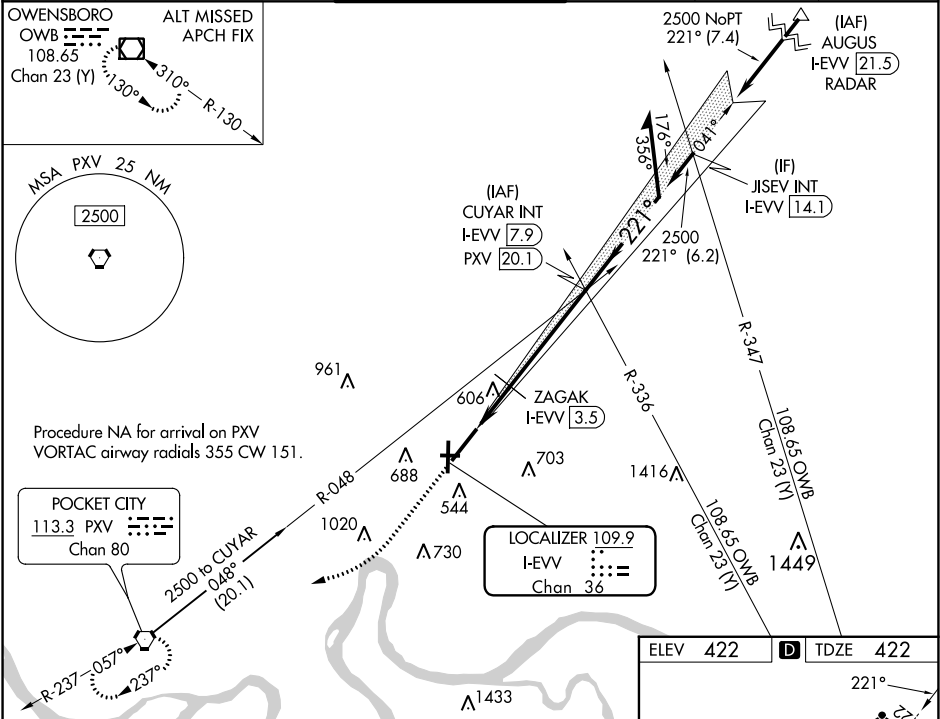

1000 2500 PXV	CUYAR INT I-EVV [7.9]	ZAGAK I-EVV [3.5]	I-EVV [1.5]	I-EVV [2.6]	Remain within 10 NM
1.2 NM	0.9 NM	4.4 NM			GS 3.00° TCH 50
CATEGORY	A	B	C	D	
S-ILS 22*	622/24		200 (200-½)		
S-LOC 22	1060/24	638 (700-½)	1060-1¾	638 (700-1¾)	
CIRCLING	1060-1	638 (700-1)	1060-1¾ 638 (700-1¾)	1060-2 638 (700-2)	
ZAGAK FIX MINIMUMS (DME REQUIRED)					
S-LOC 22	840/24	418 (500-½)	840/40	418 (500-¾)	
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)	1040-2 618 (700-2)	

