

RNAV (GPS) Y RWY 3
IDAHO FALLS RGNL (IDA)


T Circling to Rwy 35 NA at night.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 54°C.

MISSED APPROACH: Climb to 5200 then climbing left turn to 7500 direct TERRE and hold.

ATIS 135.325	SALT LAKE CENTER 128.35 239.25	IDAHO FALLS TOWER★ 118.5 (CTAF) 0 257.8	GND CON 121.7	CLNC DEL 121.7	GCO 121.725	UNICOM 122.95
-----------------	-----------------------------------	--	------------------	-------------------	----------------	------------------

A diagram showing a circular path with a radius of 7 NM. The path is represented by a dashed line. Two points on the path are marked with arrows and labeled with angles: 360° and 180°. A point on the path is labeled TERRE.


Procedure NA for arrival on IDA VOR/DME
airway radials 199 CW 207.



(IAF)
ROCCA $\triangle$ 7000 NoPT
095°
(9.9)

Procedure NA for arrivals at ROCCA
on V257 south bound.

HOLD 14000
7000

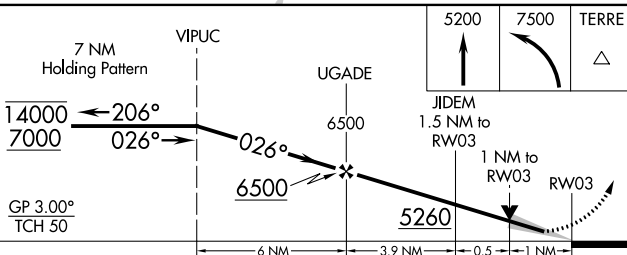

CATEGORY	A	B	C	D
LPV DA	4944- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
LNAV/ VNAV DA	5002- $\frac{3}{4}$ 258 (300- $\frac{3}{4}$)			
LNAV MDA	5100-1 356 (400-1)			
 CIRCLING	5200-1 456 (500-1)	5300-1 556 (600-1)	5400-1 $\frac{3}{4}$ 656 (700-1 $\frac{3}{4}$)	5420-2 $\frac{1}{4}$ 676 (700-2 $\frac{1}{4}$)

