

RNAV (GPS) RWY 5

NEW BEDFORD RGNL (EWB)

T Baro-VNAV and VDP NA when using Taunton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Taunton altimeter setting and increase LPV DA to 304 feet, increase LNAV/VNAV DA to 487 feet and all visibilities to RVR 5000; increase all MDA 40 feet and LNAV Cats C/D visibility to RVR 5000. For inop MALSR, when using Taunton altimeter setting, increase LPV Cat C visibility to RVR 4500, LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 3/4 miles. ** RVR 1800 authorized with use of FD or AP or HUD to DA, Nawhen using Taunton altimeter setting.

MISSED APPROACH:
Climb to 700 then
climbing left turn to
2100 direct BONNI
and hold.

[illegible]

4 NM Holding Pattern

BONNI

2100 ← 234°

054° →

054°

1500

GP 3.00° TCH 49

740

1200

RW05

1.2 NM to RW05

2 NM to RW05

WIDON

FROLY


700

2100

BONNI

*LNAV only.

CATEGORY	A	B	C	D
LPV DA **		270/24	200 (200-½)	
RNAV/ VNAV DA		453/45	383 (400-¾)	
RNAV MDA	500/24	430 (500-½)	500/40	430 (500-¾)
 CIRCLING	620-1 541 (600-1)	640-1 561 (600-1)	720-1¾ 641 (700-1¾)	960-3 881 (900-3)

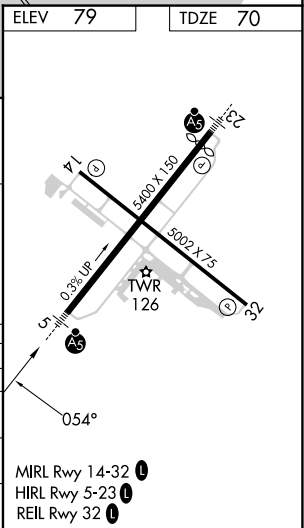

NE-1, 30 NOV 2023 to 28 DEC 2023