

WAAS CH 61002 W28A	APP CRS 276°	Rwy Idg TDZE Apt Elev	8394 7 65
--	------------------------	-----------------------------	--------------------------------------

RNAV (GPS) Y RWY 28R
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

RNP APCH - GPS.


Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C. For inop ALS, increase LNAV Cats C and D visibility to 1¾ SM.




MISSED APPROACH:
Climb to 800 then climbing right turn to 4000 direct HUKUK and hold, continue climb-in-hold to 4000.

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC
------------------------	---------------------------------------	--	-------------------------	--------------------------	-------

MISSED APCH FIX

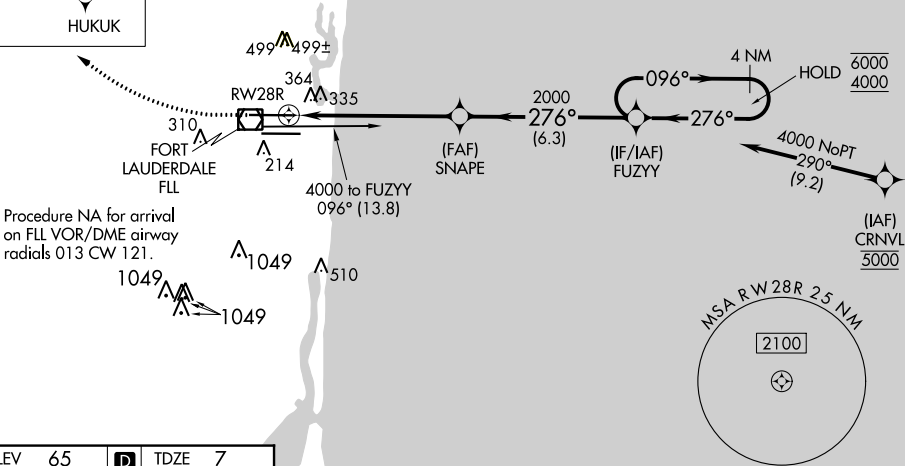

ELEV 65	D	TDZE 7
---------	----------	--------



800 4000 HUKUK				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 6°).			
				4 NM Holding Pattern			
				GP 3.00° TCH 49			
CATEGORY				A	B	C	D
LPV DA				257/40		250 (200-¾)	
LNAV/VNAV DA				529/55		522 (500-1)	
LNAV MDA				620/24 613 (600-½)		620-1¾ 613 (600-1¾)	
CIRCLING				680-1 615 (700-1)		800-2 735 (800-2) 800-2¼ 735 (800-2¼)	