

WAAS
CH **97709**
W09A

APP CRS
089°

Rwy Idg
TDZE **385**
Apt Elev **387**

RNAV (GPS) RWY 9

HENDERSON CITY-COUNTY (EHR)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48° C.
Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using
Evansville altimeter setting. When local altimeter setting not received, use Evansville altimeter
setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats, LNAV/VNAV all
Cats and LNAV Cats C/D visibilities ¼ mile.

MISSED APPROACH:
Climb to 2500 direct
ONZIG and hold.

AWOS-3PT 118.85	EVANSVILLE APP CON ★ 124.025 257.8	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

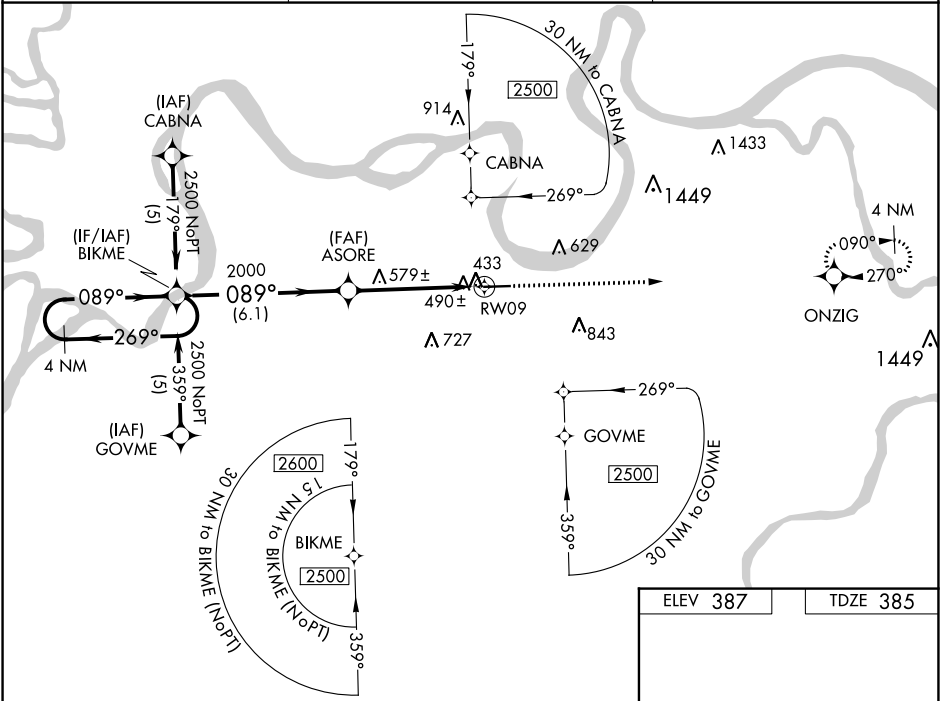

4 NM
Holding Pattern

BIKME

ASORE

2500

ONZIG

269°

089°

089°

2000

GP 3.00°
TCH 47

*1.3 NM
to RW09

*LNAV only.

RW09

6.1 NM

3.6 NM

1.3

CATEGORY	A	B	C	D
LPV DA	694-1 309 (400-1)			
LNAV/VNAV DA	774-1¼ 389 (400-1¼)			
LNAV MDA	840-1 455 (500-1)		840-1⅝ 455 (500-1⅝)	840-1½ 455 (500-1½)

ELEV 387

TDZE 385

REIL Rwy 9 and 27 0

MIRL Rwy 9-27 0