

WAAS  
CH **69240**  
**W04A**

APP CRS  
**038°**


Rwy Idg  
TDZE  
Apt Elev  
**9207**  
**4150**  
**4200**

**RNAV (GPS) RWY 4**  
ALAMOGORDO-WHITE SANDS RGNL (A.L.M)

RNP APCH.  
Circling NA to Rwy 17 and 35. Circling NA for Cats C and D southeast of Rwy 4-22.  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. Civil aircraft require ATC clearance prior to entering Restricted Area 5107D.

MISSED APPROACH: Climb to 4600 then climbing left turn to 6000 direct HALIC and hold.

|                          |                                            |                                 |
|--------------------------|--------------------------------------------|---------------------------------|
| AWOS-3<br><b>127.825</b> | HOLLOMAN APP CON ★<br><b>120.6 269.225</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|--------------------------------------------|---------------------------------|

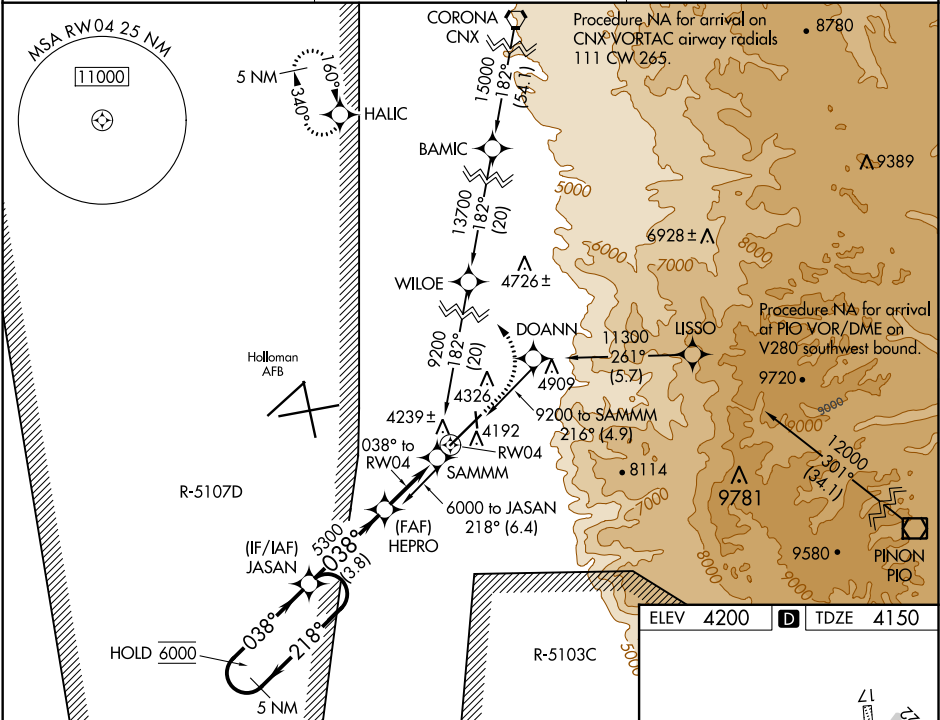

|                      |                       |                       |                         |                         |
|----------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| 5 NM Holding Pattern |                       |                       |                         |                         |
| GP 3.20° TCH 55      |                       |                       |                         |                         |
| CATEGORY             | A                     | B                     | C                       | D                       |
| LPV DA               | 4400-1 250 (200-1)    |                       |                         |                         |
| LNAV/VNAV DA         | 4420-1 270 (300-1)    |                       |                         |                         |
| LNAV MDA             | 4500-1 350 (300-1)    |                       |                         |                         |
| CIRCLING             | 4760-1<br>560 (600-1) | 4880-1<br>680 (700-1) | 4960-2¼<br>760 (800-2¼) | 4960-2½<br>760 (800-2½) |

