

WAAS CH 93627 W30A	APP CRS 300°	Rwy Idg TDZE 1456 Apt Elev 1456
--	------------------------	---


RNAV (GPS) RWY 30

ELY MUNI (ELO)

⚠ Baro-VNAV NA when using Cook altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 34°C (93°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Cook altimeter setting and increase all DA/MDA 100 feet; increase LPV visibility ½ mile all Cats, LNAV/VNAV visibility ¾ mile all Cats, and LNAV Cat C/D visibility ¼ mile.

MISSED APPROACH: Climb to 4100 direct PUXIE and hold.

AWOS-3PT 132.025	MINNEAPOLIS CENTER 127.9 281.45	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

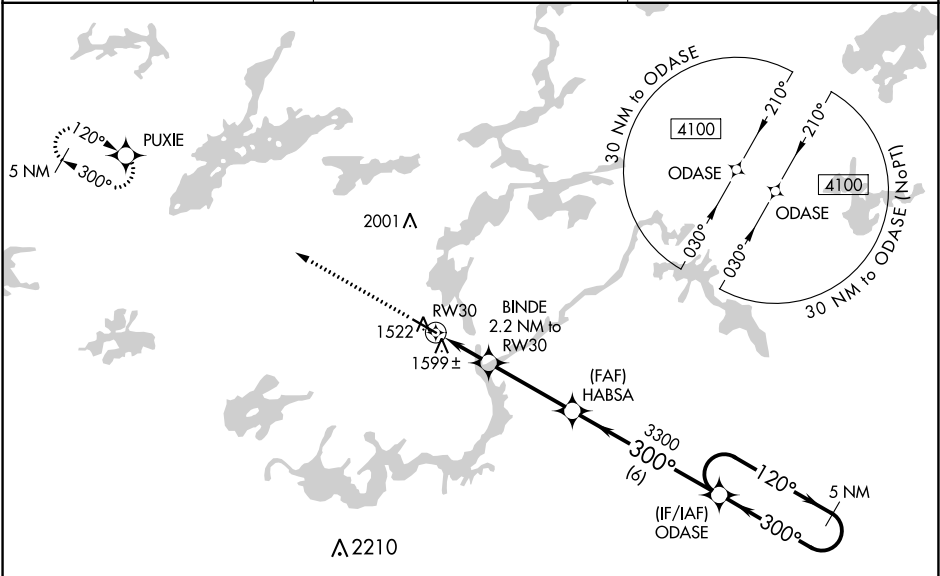

ELEV 1456 TDZE 1456

MIRL Rwy 12-30 **0**
REIL Rwy 12 and 30 **0**

4100	PUXIE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 41).			
*LNAV only		BINDE 2.2 NM to RW30	HABSA 3300	ODASE	5 NM Holding Pattern
RW30		2200*	3300	300°	120° → 4100
		2.2 NM	3.4 NM	6 NM	GP 3.00° TCH 52
CATEGORY	A	B	C	D	
LPV DA	1706-1 250 (300-1)				
LNAV/VNAV DA	1780-1 324 (400-1)				
LNAV MDA	1860-1 404 (500-1)		1860-1½ 404 (500-1½)		
CIRCLING	1920-1 464 (500-1)	1940-1 484 (500-1)	1940-1½ 484 (500-1½)	2360-3 904 (1000-3)	

NC-1, 30 NOV 2023 to 28 DEC 2023

NC-1, 30 NOV 2023 to 28 DEC 2023