
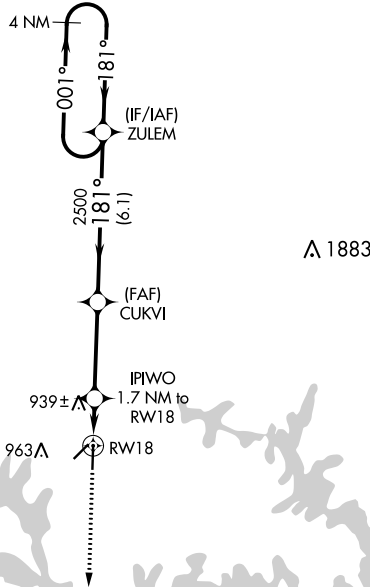


WAAS CH <b>65637</b> <b>W18A</b>	APP CRS <b>181°</b>	Rwy Idg TDZE Apt Elev	<b>5000</b> <b>810</b> <b>823</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 18


CLINTON RGNL (GLY)

RNP APCH.		MISSED APPROACH: Climb to 3000 direct YIKUY and hold.
⚠ Baro-VNAV NA when using Whiteman AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 4 NA at night. When local altimeter setting not received, use Whiteman AFB altimeter setting and increase all DA 61 feet and all MDA 80 feet, visibility LNAV Cat C/D ¾ mile, Circling Cat D ¼ mile. Rwy 18 helicopter visibility reduction below ¾ SM NA. VDP NA when using Whiteman AFB altimeter setting.		
AWOS-3PT <b>120.475</b>	WHITEMAN APP CON ★ <b>127.45</b>	UNICOM <b>122.8 (CTAF) 0</b>

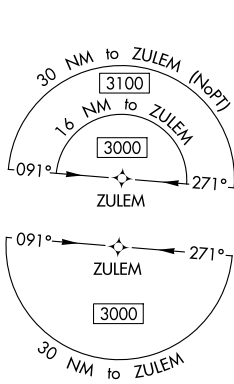

NC-3, 30 NOV 2023 to 28 DEC 2023

NC-3, 30 NOV 2023 to 28 DEC 2023

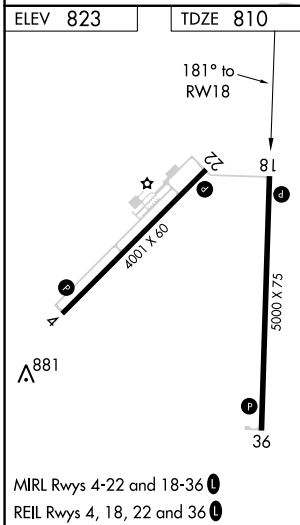

3000	YIKUY	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 39).		ZULEM	4 NM Holding Pattern
*LNAV only.	IPIWO 1.7 NM to RW18	CUKVI 2500	181°	001°	3000
	1.1 NM to RW18	1380*	2500		GP 3.00° TCH 45
	1.1 NM	0.6	3.5 NM	6.1 NM	
CATEGORY	A	B	C	D	
LPV DA		1060-1	250 (300-1)		
LNAV/VNAV DA		1060-1	250 (300-1)		
LNAV MDA		1200-1	390 (400-1)		
<b>C</b> CIRCLING	1280-1 457 (500-1)	1300-1 477 (500-1)	1340-1½ 517 (600-1½)	1480-2 657 (700-2)	