

WAAS
CH **93910**
W27A

APP CRS
272°

Rwy Idg **4300**
TDZE **22**
Apt Elev **22**

RNAV (GPS) RWY 27L

NORTH PALM BEACH COUNTY GENERAL AVIATION (F45)



▼

▲ NA

Circling NA to Rwy 9L and 27R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Palm Beach Init altimeter setting. DME/DME RNP-0.3 NA. When local altimeter not received, use Palm Beach Init altimeter setting and increase LPV DA to 369 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 423 feet and all visibilities 1/8 SM; increase all MDA 40 feet and Cat C/D visibility 1/8 SM. Rwy 27L helicopter visibility reduction below 3/8 SM NA.

MISSED APPROACH:
Climb to 2500 direct YIGBO and hold.

AWOS-3 119.975	PALM BEACH APP CON 128.3 317.4	CLNC DEL 120.825	UNICOM 123.075 (CTAF) 0
--------------------------	--	----------------------------	-----------------------------------

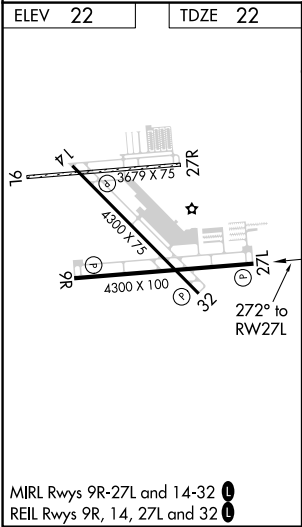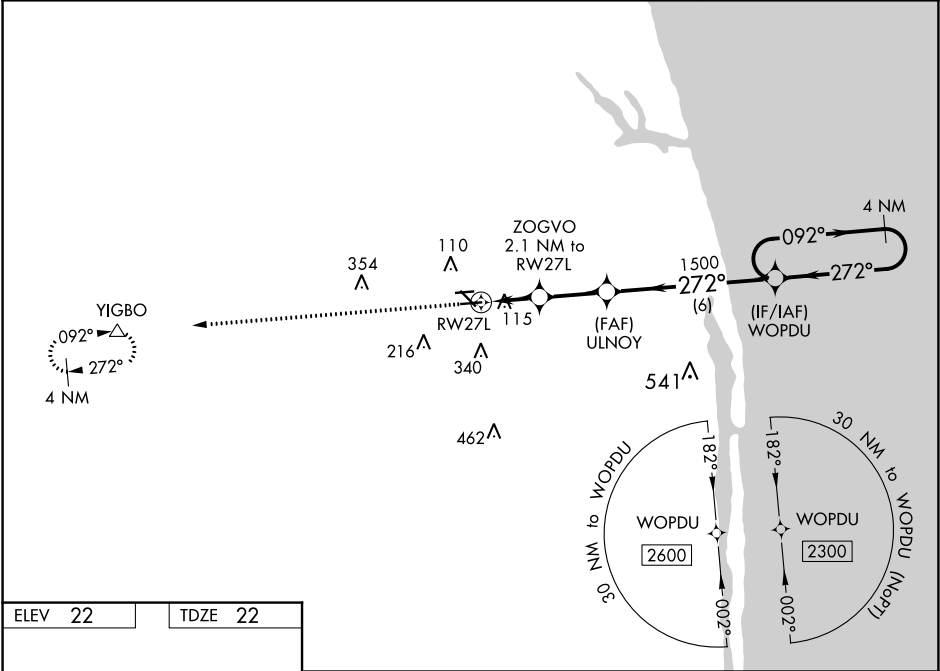

2500 YIGBO
▲

*LNAV only.

ZOGVO
2.1 NM to RWY 27L

ULNOY
1500

WOPDU
4 NM Holding Pattern

RWY 27L

*720

1500

2300

GP 3.00°
TCH 40

CATEGORY	A	B	C	D
LPV DA	341-7/8	319 (400-7/8)		
LNAV/VNAV DA	395-1	373 (400-1)		
LNAV MDA	380-1	358 (400-1)		
CIRCLING	460-1 438 (500-1)	480-1 458 (500-1)	700-2 678 (700-2)	720-2 1/4 698 (700-2 1/4)