

APP CRS	Rwy Idg	8000
313°	TDZE	476
	Apt Elev	487

RNAV (RNP) Z RWY 31L

DALLAS LOVE FLD (DAL)



▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 48°C (119°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop MALSR, increase RNP 0.30 visibility all Cats to 2½ miles.

MALSR

MISSED APPROACH:

Climb to 1700 then climbing right turn to 4000 direct TADDI and hold.

D-ATIS	REGIONAL APP CON	LOVE TOWER	GND CON	CLNC DEL	CPDLC
120.15	NORTH 124.3 282.275 SOUTH 125.2 343.65	123.7 239.3	121.75 348.6	127.9	

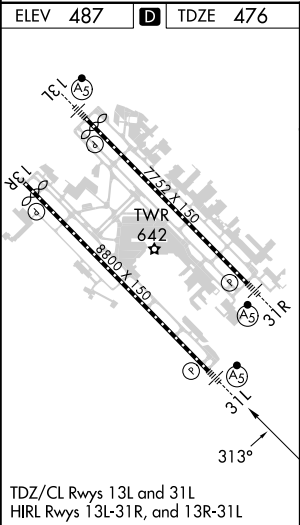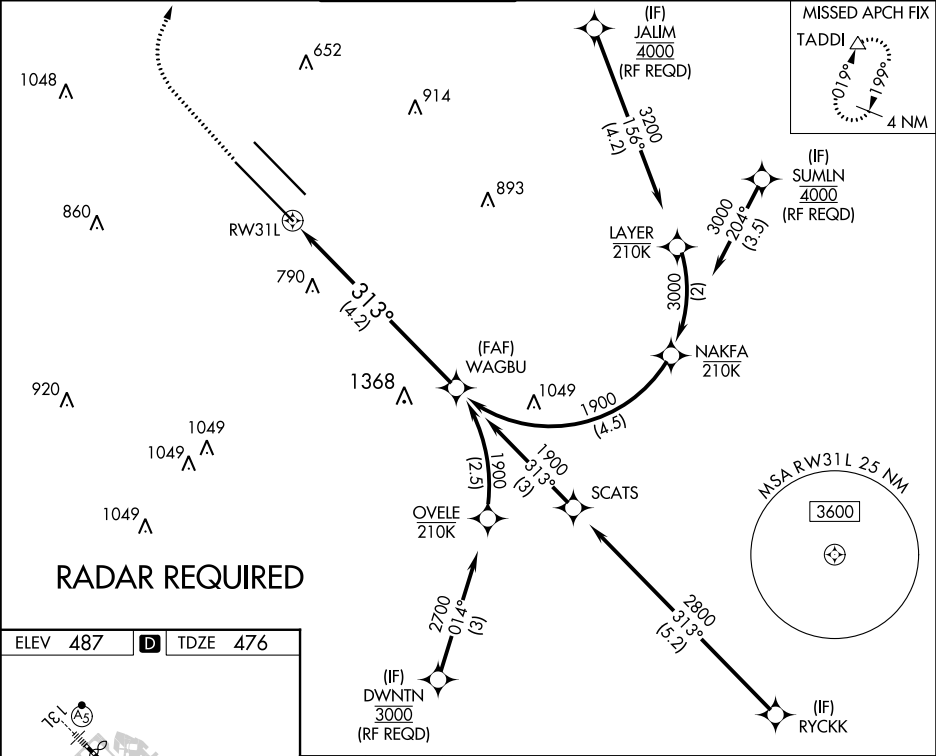

1700

4000

TADDI

See planview for multiple IF locations.

WAGBU

1900

1900

GP 3.08°

TCH 55

RW31

313°

4.2 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	1117-1½	641 (700-1½)		

AUTHORIZATION REQUIRED