

APP CRS
167°

Rwy Idg
TDZE
4415
Apt Elev
4415

RNAV (RNP) Y RWY 17R

RENO/TAHOE INTL (RNO)


RNP AR APCH - GPS.

▼ For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C.
For inop ALS, increase RNP 0.1 DA all
Cats visibility to RVR 5500, increase RNP 0.2 DA all Cats visibility to 1½ SM, increase RNP 0.3 DA all Cats visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 13000 on track 167° to ZAKBI and on track 183° to USINE and on track 127° to YARKU and hold, continue climb-in-hold to 13000.
Missed approach requires minimum climb of 222 feet per NM to 7220.
* Missed approach requires minimum climb of 266 feet per NM to 7240.

D-ATIS	NORCAL APP CON	RENO TOWER	GND CON	CLNC DEL	CPDLC
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6	124.9 370.85	

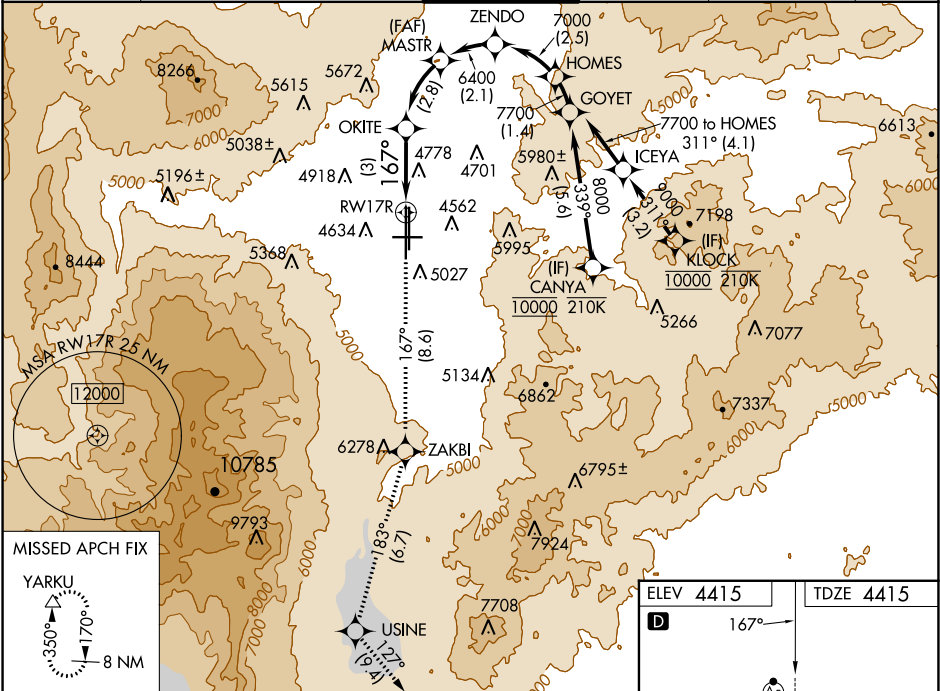

13000
tr 167°

ZAKBI
tr 183°

USINE
tr 127°

YARKU
△

See planview for multiple IF locations.

RW17R

OKITE

MASTR

ZENDO

HOMES

7700

GP 3.08°
TCH 75

3 NM

2.8 NM

2.1 NM

2.5 NM

CATEGORY	A	B	C	D
RNP 0.10 DA*	4759/30	344 (400-¾)		
RNP 0.20 DA#	4985-1¼	570 (600-1¼)		
RNP 0.30 DA	5091-1½	676 (700-1½)		

AUTHORIZATION REQUIRED

ELEV 4415

TDZE 4415

D

167°

MIRL Rwy 8-26
REIL Rwys 8, 17L, 26, and 35R
HIRL Rwys 17R-35L and 17L-35R