

LOC/DME	I-MYQ	APP CRS	Rwy Idg	9509
111.1		238°	TDZE	170
Chan 48			Apt Elev	173

ILS or LOC RWY 24

BRADLEY INTL (BDL)



▼

▲

MALSR

MISSED APPROACH: Climb to 4000 then left turn direct HFD VOR/DME and hold.

D-ATIS	BRADLEY APP CON	BRADLEY TOWER	GND CON	CLNC DEL	CPDLC
118.15	123.95 290.55 (061°-240°)	120.3 351.8	121.9 348.6	121.75 322.3	
	125.35 281.5 (241°-060°)				

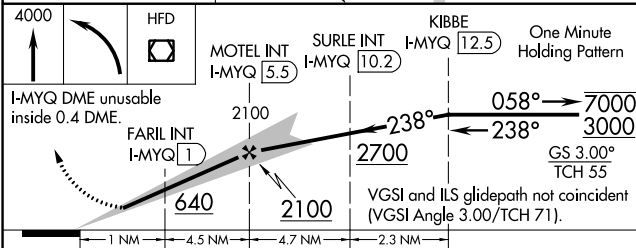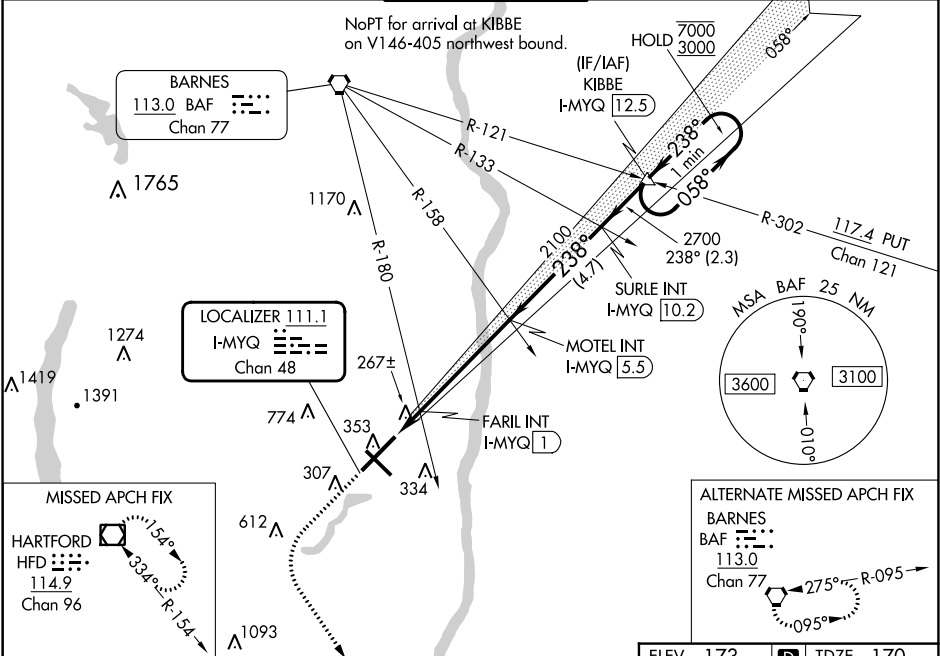

CATEGORY	A	B	C	D
S-ILS 24	370/18	200 (200-½)		
S-LOC 24	640/24	470 (500-½)	640/50	470 (500-1)
CIRCLING	700-1	527 (600-1)	1120-2¾ 947 (1000-2¾)	1220-3 1047 (1100-3)
FARIL FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 24	520/24	350 (400-½)	520/30	350 (400-¾)
CIRCLING	700-1	527 (600-1)	1120-2¾ 947 (1000-2¾)	1220-3 1047 (1100-3)

