

APP CRS	Rwy Idg	9509
238°	TDZE	170
	Apt Elev	173

RNAV (RNP) Z RWY 24
BRADLEY INTL (BDL)

BRADLEY INTL (BDL)

T For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS required.
For inop ALS, increase all Cats visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3000 on track 238° to PENNA and hold.

D-ATIS
118.15


BRADLEY APP CON		
123.95	290.55	(061°-240°)
125.35	281.5	(241°-060°)

BRADLEY TOWER
120.3 351.8

GND CON
121.9 348.6

CLNC DEL
121.75 322.3


CPDLC

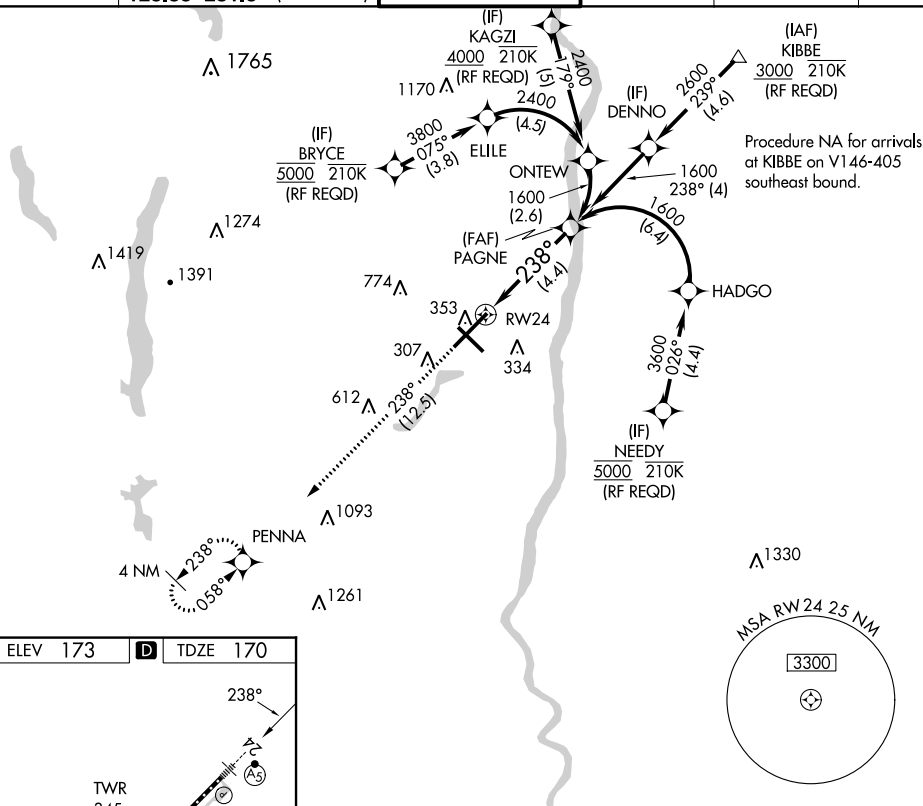

ELEV	173	D	TDZE	170
------	-----	----------	------	-----

D

D	TDZE 170
----------	----------



TDZ/CL Rwy 6 and 24
HIRL Rwy 6-24 and 15-33
REIL Rwy 6 and 15

3000 ↑ tr 238°	PENNA 
----------------------	--

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

PAGNE

1.00

1600

	GP 3.00°
	TCH 55

See planview for multiple IF locations.

CATEGORY

A

C

--	--

RNP 0.30 DA

622/60	452 (500-1¼)
--------	--------------

AUTHORIZATION REQUIRED