

APCH CRS	Rwy Idg	8196
128°	TDZE	4294
	Arprt Elev	4295

AL-512 (USAF)

CANNON AFB (KCVS)

RNP APCH


* When ALS inop increase vis to 1 3/8 miles.
** When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1 1/2 miles.

SSALR



MISSED APPROACH: Climb to 7000 direct HOMEP, then track 128° to SOPLE and hold.

ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225
---------------------	---------------------------------	-----------------------	------------------------	---------------------------

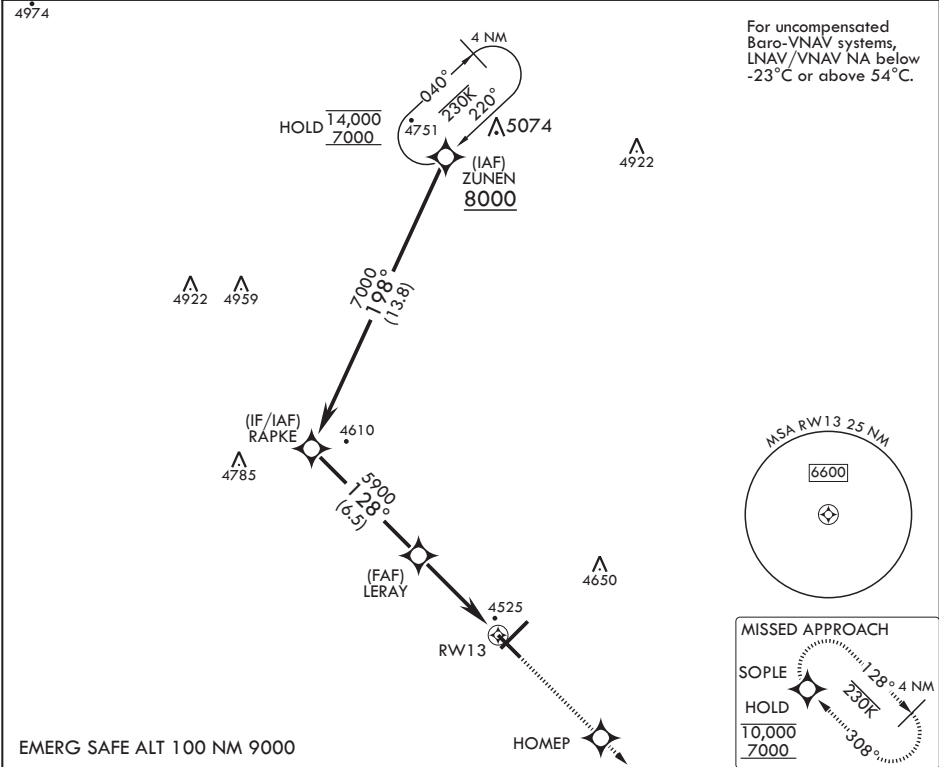

RAPKE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37).		7000	HOMEP	tr 128°	SOPLE	ELEV 4295	TDZE 4294
7000		128°		LERAY	1.5 NM to RW13		RW13		
GP 3.04° TCH 45		5900		4.8 NM					
CATEGORY	A	B	C	D	E				
LNAV/VNAV DA*	4766-1		472	(500-1)					
LNAV MDA**	4820-½ 526 (600-½)		4820-1	526	(600-1)				
CIRCLING	4840-1 545 (600-1)		4860-1½ 565 (600-1½)	5000-2¼ 705 (800-2¼)	5020-2½ 725 (800-2½)				