


VORTAC PIE	APP CRS	Rwy Idg	6000
116.4	039°	TDZE	11
Chan 111		Apt Elev	11

VOR RWY 4

ST PETE-CLEARWATER INTL (PIE)

ADF required.		MISSED APPROACH: Climbing left turn to 1700 direct CAPOK LOM and hold.	
⚠ When local altimeter setting not received, use Tampa Intl altimeter setting and increase all MDAs 40 feet; JULSO fix minimums: increase Circling Cat C/D visibility ¼ SM. ⚠ Helicopter visibility reduction below ¾ SM NA.			
ATIS 134.5	TAMPA APP CON 125.3 316.05	ST PETERSBURG-CLEARWATER TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6
			CLNC DEL 120.6 350.2
			UNICOM 122.95

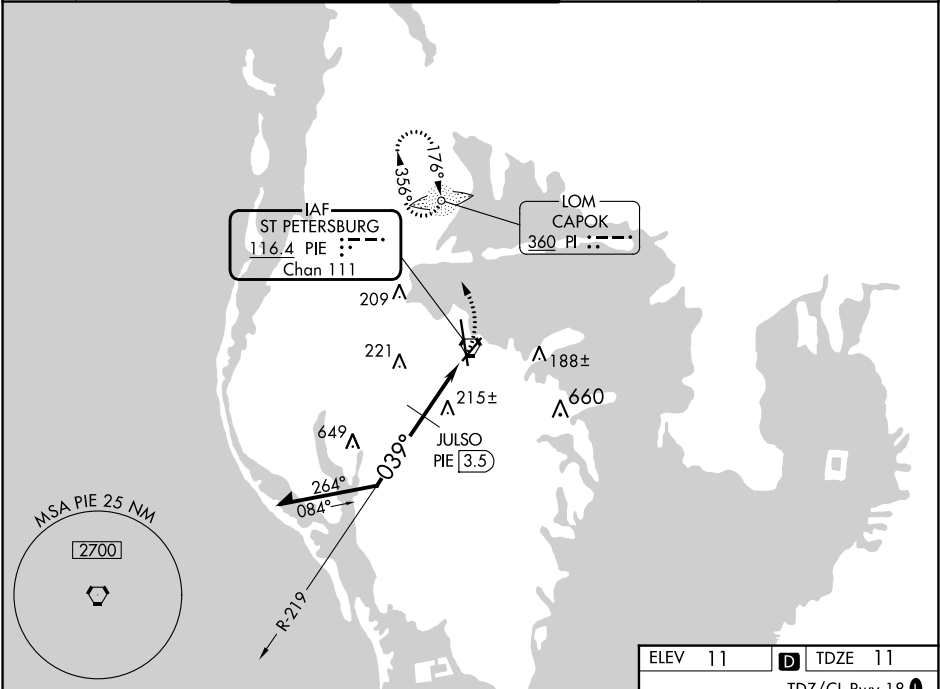

Remain within 10 NM		PIE VORTAC		1700		PI	
219°		JULSO PIE 3.5		039°		1000	
		3.5 NM					
CATEGORY	A	B	C	D			
S-4	1000-1¼ 989 (1000-1¼)	1000-1½ 989 (1000-1½)	1000-3	989 (1000-3)			
CIRCLING	1000-1¼ 989 (1000-1¼)	1000-1½ 989 (1000-1½)	1000-3	989 (1000-3)			
JULSO FIX MINIMUMS							
S-4	480-1	469 (500-1)	480-1¾	469 (500-1¾)			
CIRCLING	520-1	509 (600-1)	600-1½ 589 (600-1½)	620-2 609 (700-2)			

81

A5

4

9730-150

STAR

5

6000-150

36

2

1

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

TWR 172

039°