


WAAS CH 66099 W31A	APP CRS 312°	Rwy Idg TDZE 1679 Apt Elev 1716
--	------------------------	---

RNAV (GPS) RWY 31


MINOT INTL (MOT)

RNP APCH. V A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS increase LNAV/VNAV visibility to RVR 4500.	MALSR AS	MISSED APPROACH: Climb to 4500 direct DOYAB and hold.
--	-------------	---

ASOS 118.725	MINOT APP CON ★ 119.6 363.8	MAGIC CITY TOWER ★ 118.2(CTAF) 251.125	GND CON 121.9	UNICOM 122.95
------------------------	---------------------------------------	--	-------------------------	-------------------------

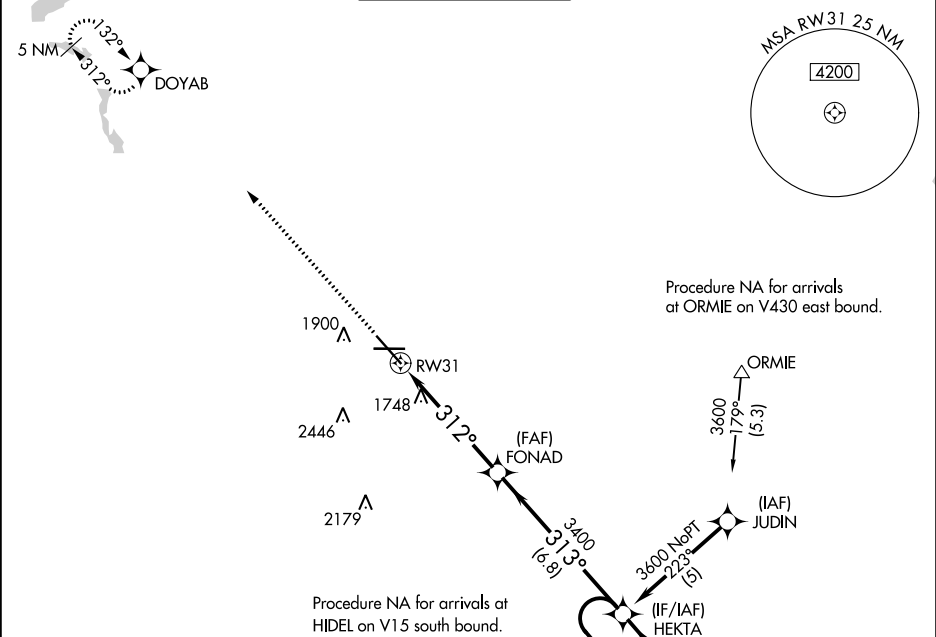

ELEV 1716	D	TDZE 1679
-----------	---	-----------

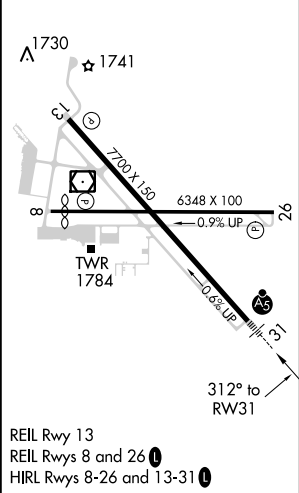

4500	DOYAB	HEKTA	5 NM Holding Pattern
*LNAV only	*0.9 NM to RWY 31	FONAD	GP 3.00° TCH 49
RWY 31	312°	3400	133°
0.9 NM	4.3 NM	6.8 NM	6000
312°	313°	313°	3600
DA	1929/24	250 (300-½)	1966/40
LNAV/VNAV DA	1966/24	287 (300-½)	287 (300-¾)
LNAV MDA	2000/24	321 (300-½)	2000/26
CIRCLING	2200-1	2240-1	2800-3
484 (500-1)	524 (600-1)	1084 (1100-3)	