

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>56340</b><br><b>W17A</b> | APP CRS<br><b>173°</b> | Rwy ldg<br>TDZE<br>Apt Elev | <b>5500</b><br><b>1302</b><br><b>1302</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|


RNAV (GPS) RWY 17

ABERDEEN RGNL (ABR)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 54°C (130°F).  
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct GOLUY and hold.

|                        |                                          |                               |
|------------------------|------------------------------------------|-------------------------------|
| ASOS<br><b>125.875</b> | MINNEAPOLIS CENTER<br><b>120.6 371.9</b> | UNICOM<br><b>122.7 (CTAF)</b> |
|------------------------|------------------------------------------|-------------------------------|

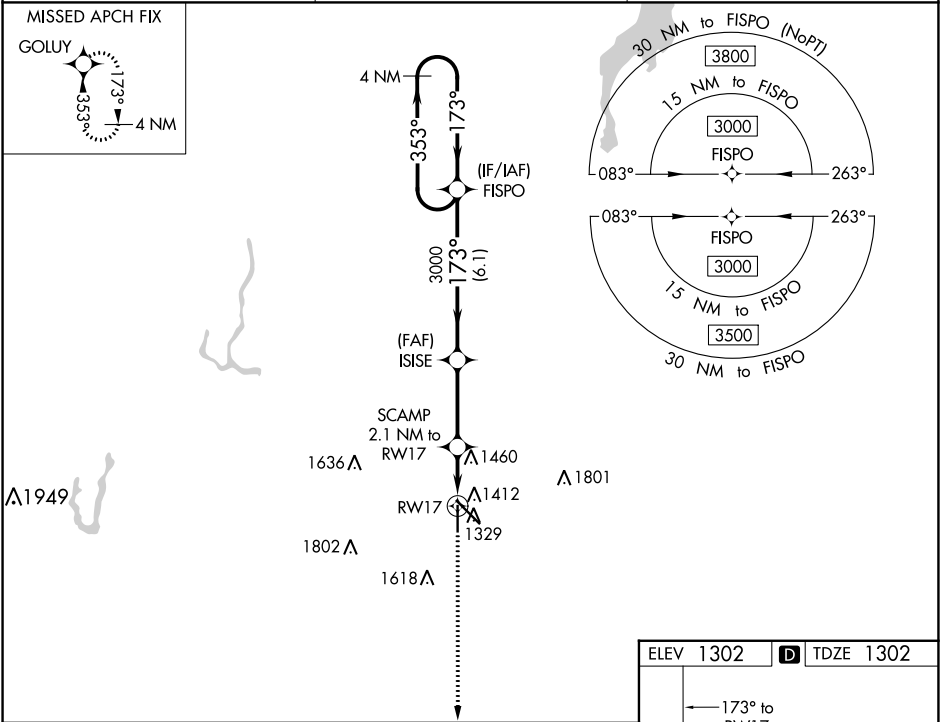

|                      |                       |                       |                               |                               |            |
|----------------------|-----------------------|-----------------------|-------------------------------|-------------------------------|------------|
| 4 NM Holding Pattern |                       | FISPO                 | ISISE                         | 3000                          | GOLUY      |
| 3000 ← 353°          |                       | 173° → 3000           | 3000                          | SCAMP 2.1 NM to RW17          | *LNAV only |
| GP 3.00° TCH 40      |                       | 6.1 NM                | 3.1 NM                        | 0.9 NM                        | 1.2 NM     |
| *2000                |                       | *1.2 NM to RW17       |                               |                               |            |
| CATEGORY             | A                     | B                     | C                             | D                             |            |
| LPV DA               | 1502-3/4              |                       | 200 (200-3/4)                 |                               |            |
| LNAV/VNAV DA         | 1624-1 1/8            |                       | 322 (400-1 1/8)               |                               |            |
| LNAV MDA             | 1720-1                | 418 (500-1)           | 1720-1 1/8                    | 418 (500-1 1/8)               |            |
| CIRCLING             | 1760-1<br>458 (500-1) | 1860-1<br>558 (600-1) | 1960-1 3/4<br>658 (700-1 3/4) | 2160-2 3/4<br>858 (900-2 3/4) |            |

