


WAAS CH 65709 W09A	APP CRS 096°	Rwy Idg 11640 TDZE 883 Apt Elev 896
--	------------------------	--


RNAV (GPS) Y RWY 9

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS.				MALSR		MISSED APPROACH: Climb to 3000 direct BLOCK and on track 136° to CALIF and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C or above 54° C. For inop ALS, increase LNAV/VNAV all Cnts visibility to RVR 6000 and LNAV Cat C/D visibility to RVR 5500.								
D-ATIS		CINCINNATI APP CON		CINCINNATI TOWER		GND CON	CLNC DEL	CPDLC
ARR	DEP	119.7 363.15 (090°-269°)		118.975 360.85 (RWY 18L/36R)				
134.375	135.3	123.875 363.15 (270°-089°)		118.3 (RWYS 18C/36C, 09/27)				
				133.325 (RWY 18R/36L)				

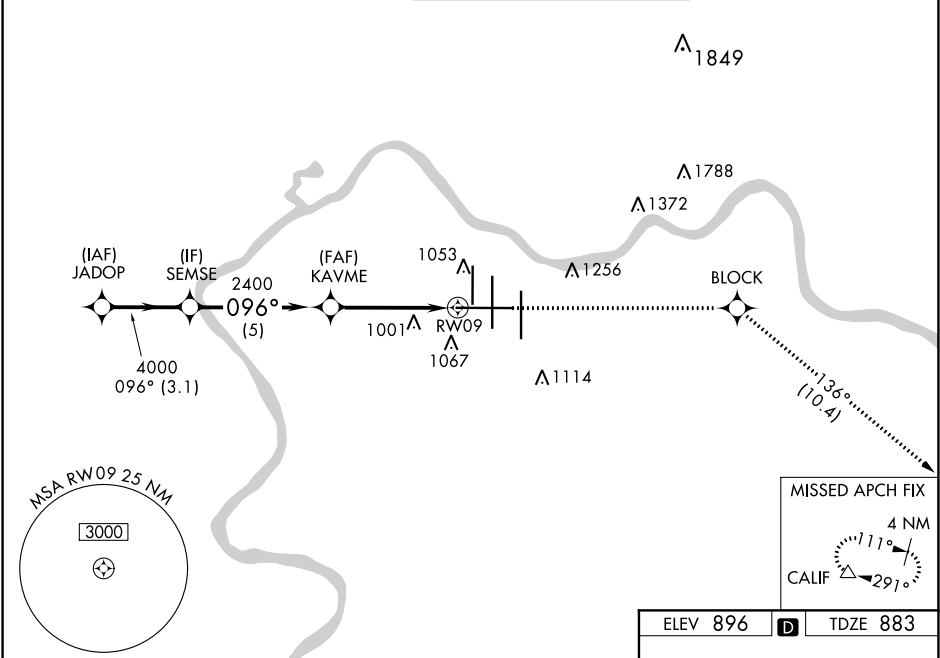

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).				3000	BLOCK	fr 136°	CALIF
JADOP SEMSE KAVME RW09 5000 096° 4000 2400 GP 3.00° TCH 52 3.1 NM 5 NM 3.6 NM 1 NM				1 NM to RW09			
CATEGORY	A	B	C	D			
LPV DA	1083/18		200 (200-½)				
LNAV/VNAV DA	1297/40		414 (500-¾)				
LNAV MDA	1260/24	377 (400-½)	1260/35	377 (400-⅝)			
CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)			

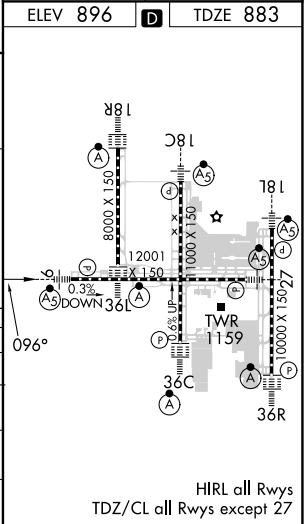

SE-1, 21 MAR 2024 to 18 APR 2024

SE-1, 21 MAR 2024 to 18 APR 2024