
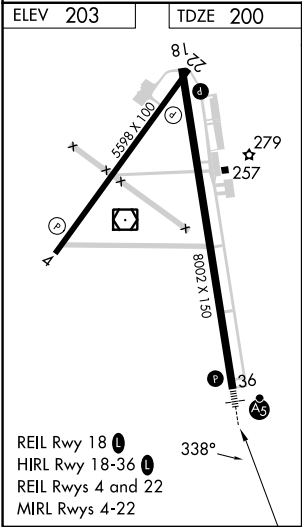
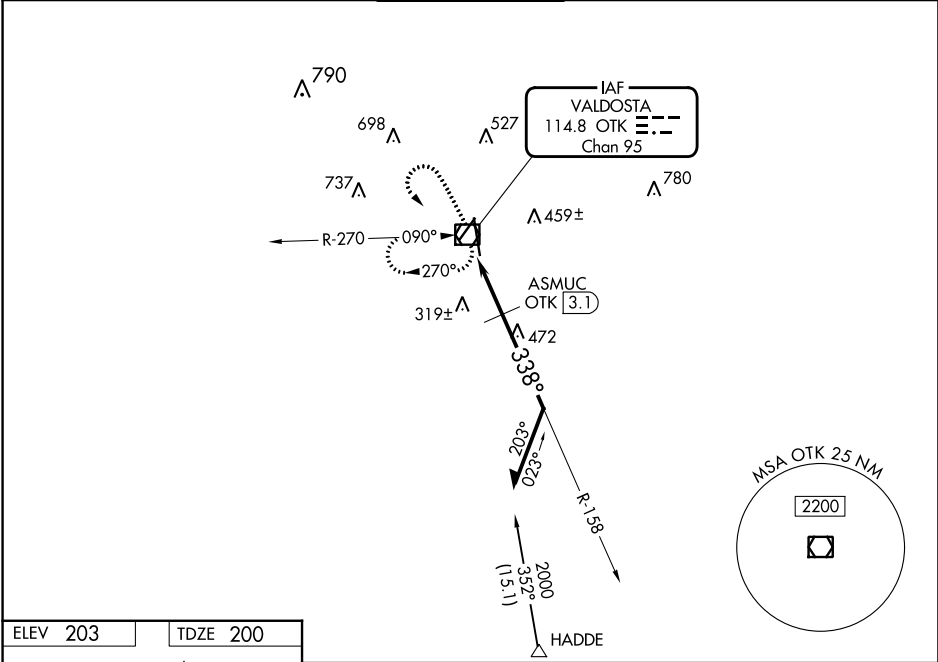


VOR/DME OTK	APP CRS	Rwy Idg	8002
114.8	338°	TDZE	200
Chan 95		Apt Elev	203

VOR RWY 36
VALDOSTA RGNL (VLD)

Rwy 36 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-36 Cats A/B visibility to 1 SM and Cats C/D to 1½ SM; ASMUC FIX MINIMUMS: increase S-36 all Cats visibility to 1 SM.		MALSR	MISSED APPROACH: Climb to 1200 then climbing left turn to 2000 direct OTK VOR/DME and hold, continue climb-in-hold to 2000.	
ASOS	VALDOSTA APP CON ★	VALDOSTA TOWER ★	GND CON	UNICOM
126.225	126.6 285.6	128.35 (CTAF) 0	121.7	122.95

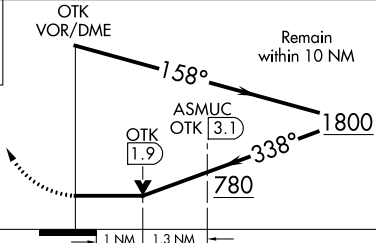

1200	2000	OTK				
CATEGORY	A	B	C	D		
S-36	780-3/4	580 (600-3/4)	780-1 1/4	580 (600-1 1/4)		
CIRCLING	780-1	577 (600-1)	900-2 697 (700-2)	1020-2 3/4 817 (900-2 3/4)		
ASMUC FIX MINIMUMS						
S-36	580-3/4		380 (400-3/4)			
CIRCLING	640-1 437 (500-1)	700-1 497 (500-1)	900-2 697 (700-2)	1020-2 3/4 817 (900-2 3/4)		