


WAAS CH 45522 W09A	APP CRS 090°	Rwy Idg 6501 TDZE 707 Apt Elev 712
--	------------------------	---

RNAV (GPS) RWY 9

AURORA MUNI (ARR)

RNP APCH - GPS.				MALSR A5 	MISSED APPROACH: Climb to 2500 direct HOGIE and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.					
ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER★ 120.6 (CTAF) 0	GND CON 121.7	CLNC DEL 121.7 (When tower closed)	UNICOM 122.95 123.5

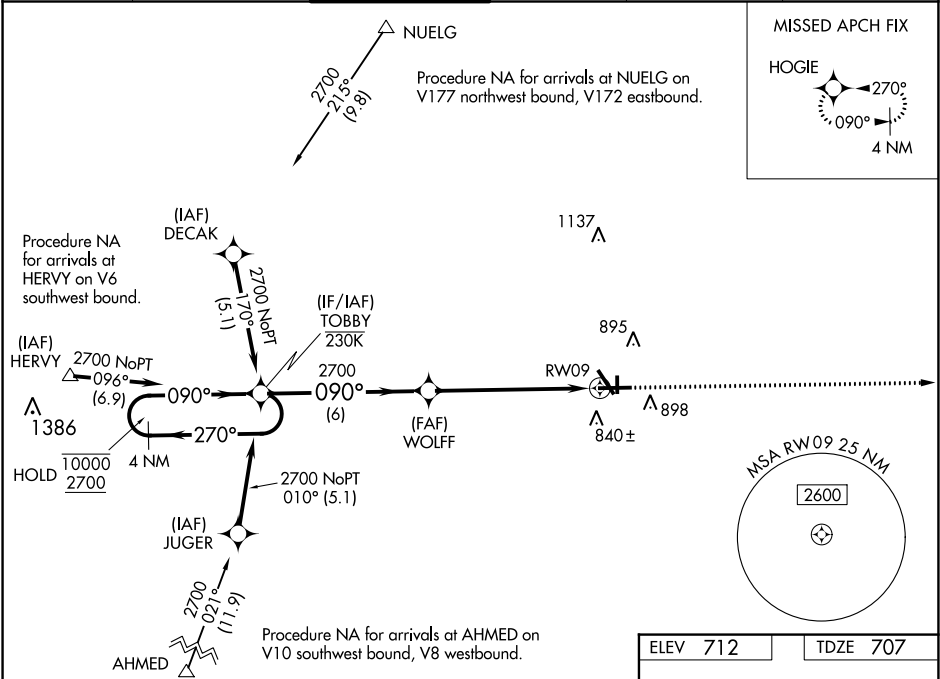

4 NM Holding Pattern		TOBBY	WOLFF	2500	HOGIE
10000 2700		2700	2700	*LNAV only.	
GP 3.00° TCH 45		2700	2700	*1.5 NM to RW09	
6 NM		4.6 NM	1.5 NM	RW09	
CATEGORY	A	B	C	D	
LPV DA	957-½		250 (300-½)		
LNAV/VNAV DA	1035-½		328 (400-½)		
LNAV MDA	1220-½ 513 (600-½)		1220-1 513 (600-1)		
CIRCLING	1220-1 508 (600-1)		1300-1½ 588 (600-1½)		1320-2 608 (700-2)

ELEV 712

TDZE 707

Detailed diagram of the runway and taxiway layout, showing RWY 9, RWY 27, and various taxiways. Key features include:

- RWY 9**: Runway 9, 5503 x 100.
- RWY 27**: Runway 27, 3198 x 75.
- TAXIWAYS**: Various taxiways including 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100.
- Obstacles**: Various obstacles including towers, lights, and structures.

MIRL Rwy 18-36

HIRL Rwy 15-33 and 9-27

REIL Rwy 15, 18, 27, and 36