

WAAS CH 41063 W 17A	APP CRS 168°	Rwy Idg 6002 TDZE 152 Apt Elev 152
---	------------------------	---


RNAV (GPS) RWY 17R
DAVID WAYNE HOOKS MEML (DWH)

RNP APCH-GPS.

▼ Baro-VNAV NA when using George Bush Intcntl/Houston altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. Rwy 17R helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use George Bush Intcntl/Houston altimeter setting: Increase all DAs 36 feet and visibilities ½ SM; increase all MDAs 40 feet. When control tower closed, LPV visibility 1 SM.

MISSED APPROACH:
Climb to 2000 direct
KOHRY and hold.

ATIS 128.375	HOUSTON APP CON 119.7 281.4	HOOKS TOWER★ 127.4 354.1 EAST 118.4 (CTAF) 0 354.1 WEST	GND CON 121.8 239.0	CLNC DEL 119.45	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------------	---------------------------	-------------------------

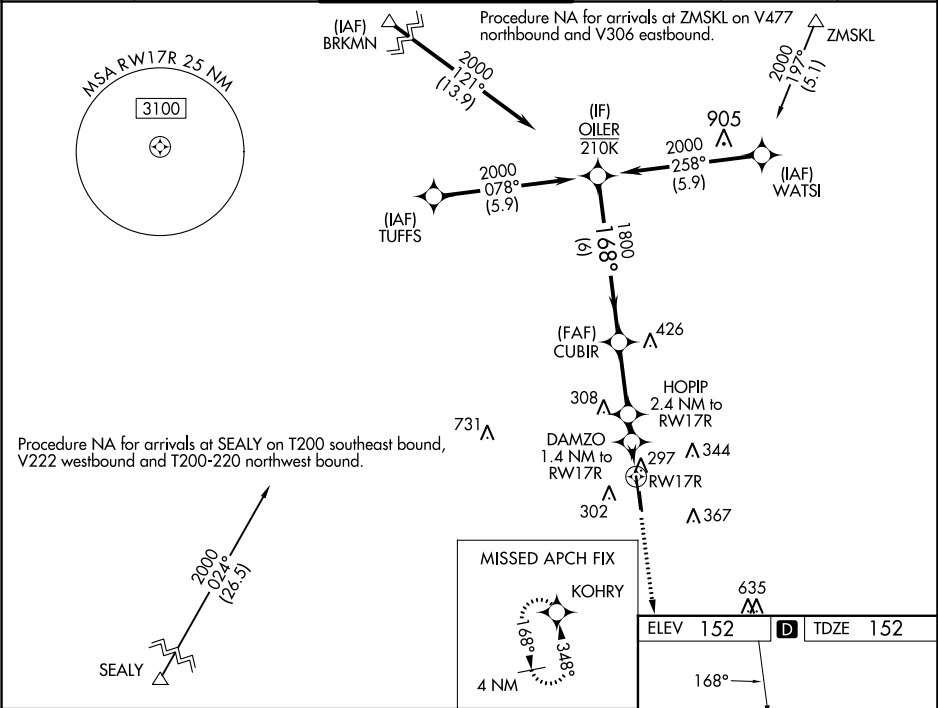

CATEGORY		A	B	C	D
LPV	DA	402-3/4 250 (300-3/4)			
LNAV/VNAV	DA	508-1 1/8 356 (400-1 1/8)			
LNAV	MDA	600-1 448 (500-1)		600-1 3/8 448 (500-1 3/8)	
CIRCLING		640-1 488 (500-1)	660-1 508 (600-1)	680-1 1/2 528 (600-1 1/2)	780-2 628 (700-2)

