

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>42717</b><br><b>W20A</b> | APP CRS<br><b>196°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5001</b><br><b>571</b><br><b>580</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 20

HENRY COUNTY (PHT)

RNP APCH - GPS.



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:  
Climb to 2300 direct  
WASED and hold.

|                          |                                        |                               |
|--------------------------|----------------------------------------|-------------------------------|
| AWOS-3<br><b>118.825</b> | MEMPHIS CENTER<br><b>134.65 316.15</b> | UNICOM<br><b>123.0</b> (CTAF) |
|--------------------------|----------------------------------------|-------------------------------|

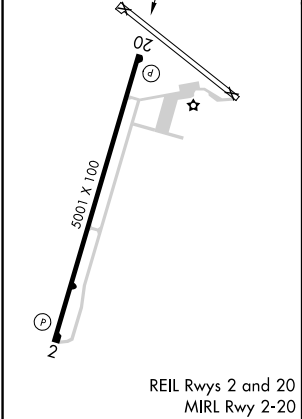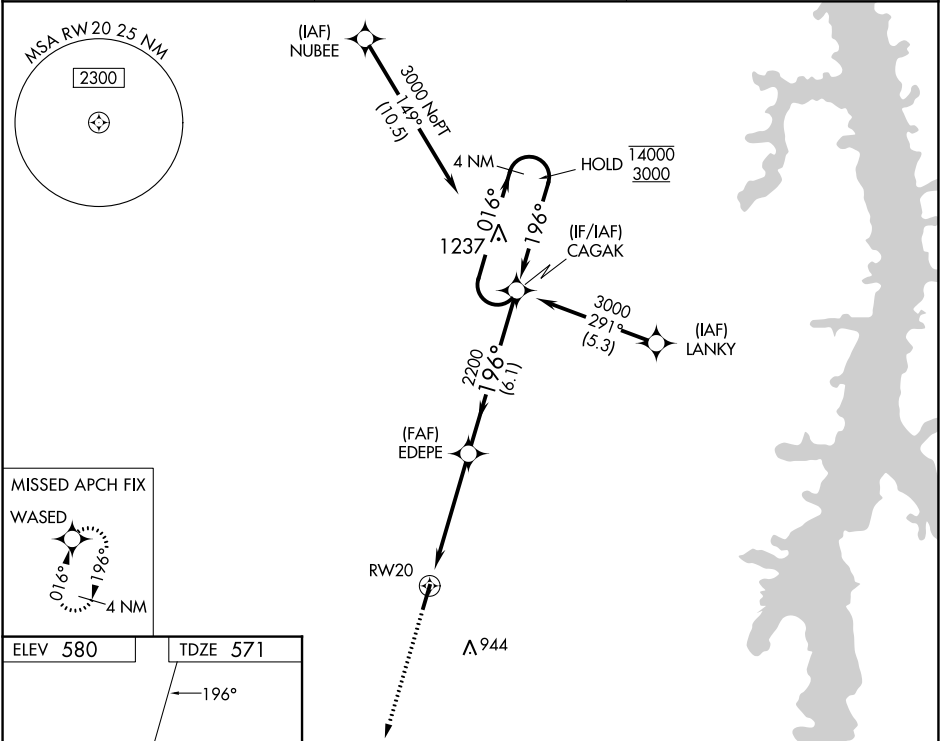

|              |        |                                                                  |                      |                      |                      |
|--------------|--------|------------------------------------------------------------------|----------------------|----------------------|----------------------|
| 2300         | WASED  | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21). |                      |                      | 4 NM Holding Pattern |
|              |        | EDEPE                                                            | 2200                 | 196°                 | 14000 3000           |
|              |        | 1.5 NM to RW20                                                   | 2200                 | 196°                 | GP 3.00° TCH 45      |
|              |        | 1.5 NM                                                           | 3.4 NM               | 6.1 NM               |                      |
| CATEGORY     | A      | B                                                                | C                    | D                    |                      |
| LPV DA       | 821-1  |                                                                  | 250 (300-1)          |                      |                      |
| LNAV/VNAV DA | 917-1¼ |                                                                  | 346 (400-1¼)         |                      |                      |
| LNAV MDA     | 1060-1 | 489 (500-1)                                                      | 1060-1½ 489 (500-1½) | 1060-1½ 489 (500-1½) |                      |
| CIRCLING     | 1080-1 | 500 (500-1)                                                      | 1300-2 720 (800-2)   | 1300-2¼ 720 (800-2¼) |                      |