

WAAS CH 40331 W27A	APP CRS 269°	Rwy Idg TDZE 686 Apt Elev 706
--	------------------------	---

RNAV (GPS) RWY 27
MACOMB MUNI (MQB)


RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using Burlington altimeter setting. Circling NA to Rwy 18 and 36.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Burlington altimeter setting and increase LPV DA to 949 feet; increase LNAV/VNAV DA to 1040 feet; increase all MDAs 80 feet and visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2300 direct TUYOB and hold.

AWOS-3 119.025	CHICAGO CENTER 135.6 316.1	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

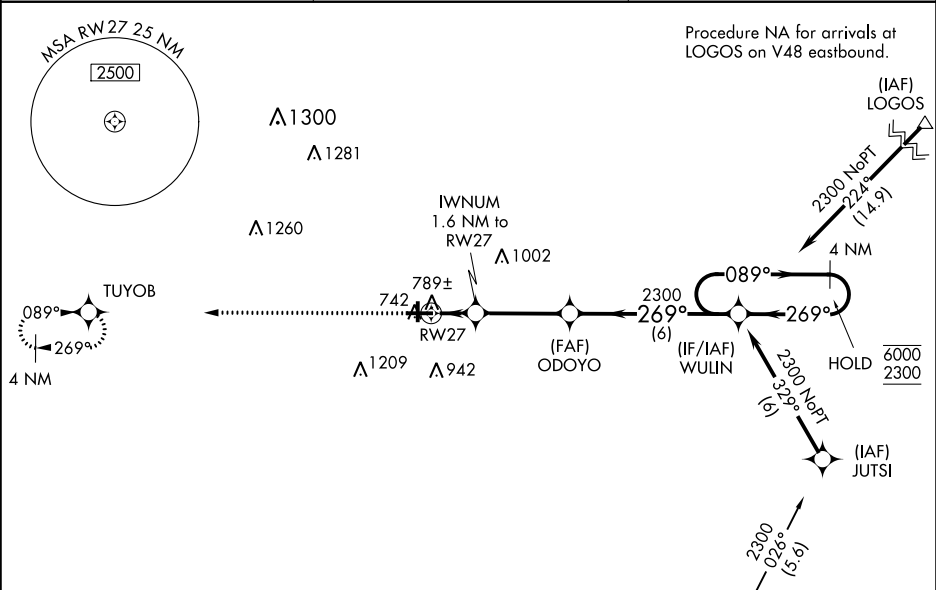

ELEV 706	TDZE 686
-----------------	-----------------



Procedure NA for arrivals at BADER on V67 southeast bound.				
3000 TUYOB 4 NM Holding Pattern WULIN ODOYO IWNUM 1.6 NM to RW27 1 NM to RW27 0.6 NM 3.4 NM 6 NM 2300 269° 089° 269° GP 3.00° TCH 40				
CATEGORY	A	B	C	D
LPV DA	886-1 200 (200-1)			
LNAV/VNAV DA	977-1 291 (300-1)			
LNAV MDA	1040-1 354 (400-1)			
CIRCLING	1120-1 414 (500-1)	1260-1 554 (600-1)	1520-2½ 814 (900-2½)	1520-2¾ 814 (900-2¾)