


|               |               |                            |          |     |     |      |      |      |      |
|---------------|---------------|----------------------------|----------|-----|-----|------|------|------|------|
| ATIS ★285.45  | AL-5985 [USN] | Rwy                        | Knots    | 60  | 120 | 180  | 240  | 300  | 360  |
| CLNC DEL      |               | 3                          | V/V(fpm) | 378 | 756 | 1134 | 1512 | 1890 | 2268 |
| 134.675 271.6 |               | Minimum Climb Rate to 1000 |          |     |     |      |      |      |      |
| GND CON       |               |                            |          |     |     |      |      |      |      |
| 134.675 360.2 |               |                            |          |     |     |      |      |      |      |
| TOWER ★       |               |                            |          |     |     |      |      |      |      |
| 128.775 340.2 |               |                            |          |     |     |      |      |      |      |
| SOCAL DEP CON |               |                            |          |     |     |      |      |      |      |
| 127.3 323.0   |               |                            |          |     |     |      |      |      |      |

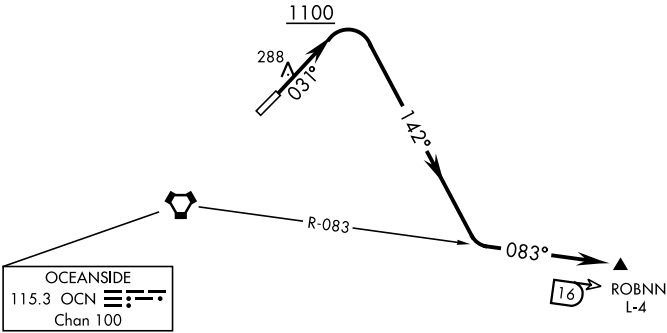

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 3: Climb on heading 031° to 1100 then climbing right turn heading 142° to intercept OCN VORTAC R-083 to ROBNN. Cross ROBNN at 5000 or as directed by ATC.