


RNAV (GPS) RWY 8
MACKINAC ISLAND (MCD)

T Rwy 8 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, **A** use Pellston altimeter setting and increase all MDA 60 feet, increase LP and LNAV Cat C visibility $\frac{1}{8}$ SM and Circling Cat C visibility $\frac{1}{4}$ SM. Straight-in and Circling Rwy 8 NA at night.

MISSED APPROACH:
Climb to 2500 direct
HUVTL and hold.

AWOS-3 118.275	MINNEAPOLIS CENTER 134.6 354.05	UNICOM 122.7 (CTAF)	122.80
--------------------------	---	-------------------------------	---------------

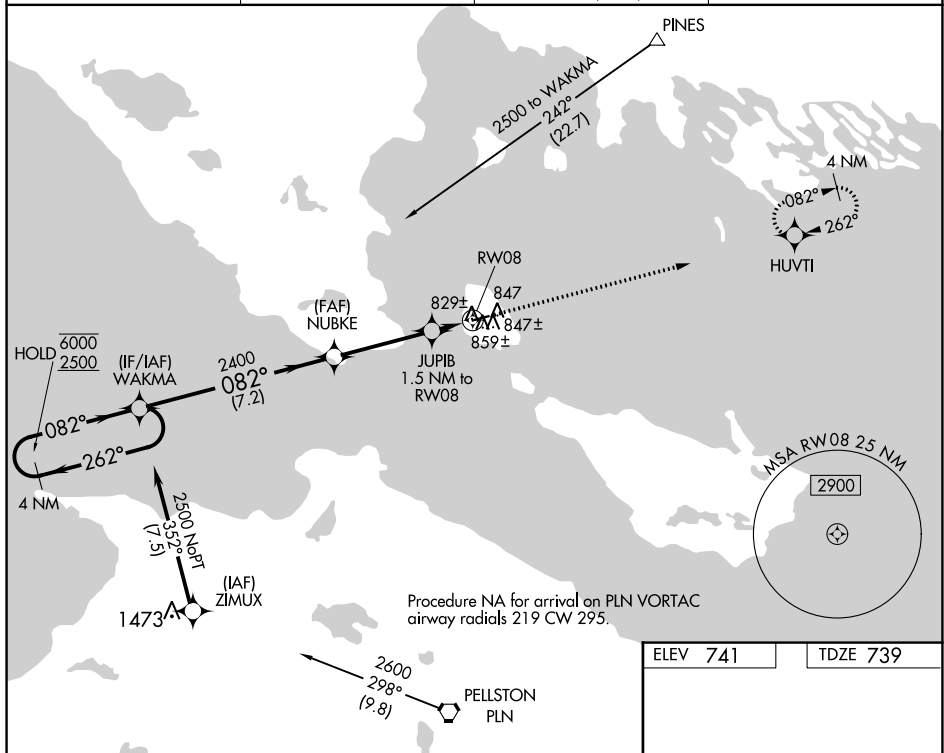

4 NM Holding Pattern

WAKMA

6000 ← 262°

2500 → 082°

082°

NUBKE

2400

JUIB 1.5 NM to RW08

1240

7.2 NM

3.6 NM

1.5

RW08

CATEGORY

A

B

C

D

LP MDA

1080-1 341 (400-1)

NA

LNAV MDA

1120-1 381 (400-1)

1120-1 $\frac{1}{8}$ 381 (400-1 $\frac{1}{8}$)


NA

C CIRCLING

1320-1 579 (600-1)

1320-1 $\frac{1}{2}$ 579 (600-1 $\frac{1}{2}$)

NA

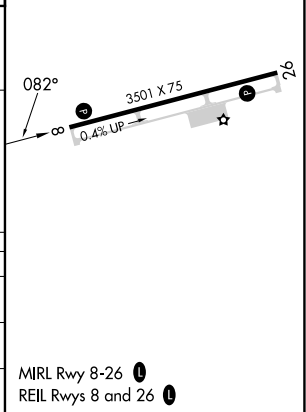

EC-1, 21 MAR 2024 to 18 APR 2024