


WAAS CH 56635 W36A	APP CRS 002°	Rwy Idg 4000 TDZE 936 Apt Elev 936
--	------------------------	---

RNAV (GPS) RWY 36
WARSAW MUNI (RAW)


V Baro-VNAV and VDP NA when using Clinton altimeter setting. For uncompensated Baro-VNAV **A** NA systems, UNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter not received, use Clinton altimeter setting and increase all DA 53 feet and all MDA 60 feet. Increase UNAV/VNAV all Cats visibility to 1½ mile, UNAV Cats C/D visibility to 1¾ mile and Circling Cat C visibility to 2 and Cat D visibility to 2¼ mile.

MISSED APPROACH:
Climb to 2600 direct
WOCAZ and hold.

AWOS-3PT 118.325	WHITEMAN APP CON ★ 127.45 284.0	CTAF 122.9 0
----------------------------	---	------------------------

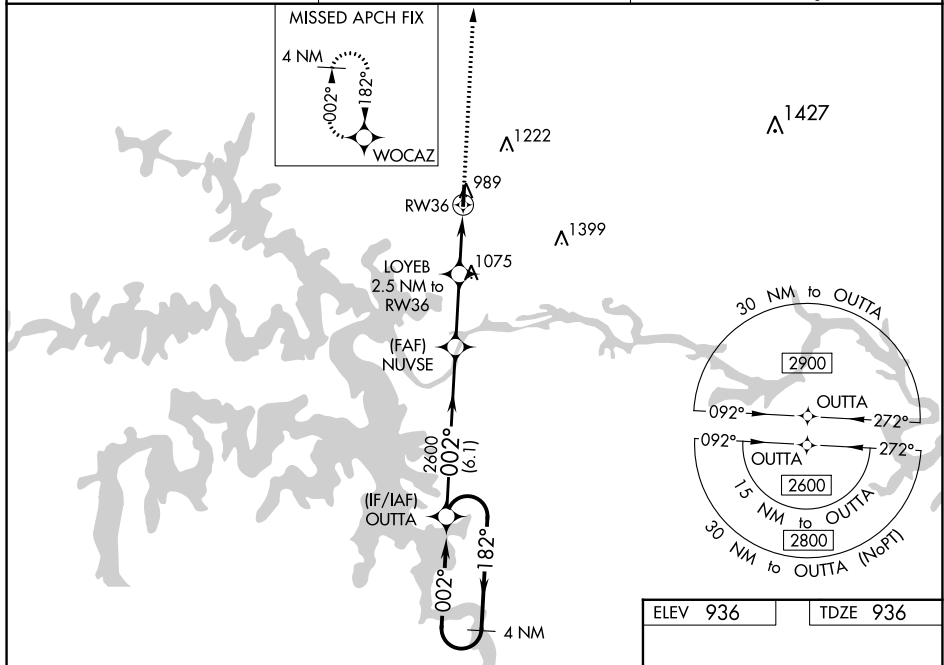

ELEV 936		TDZE 936
----------	--	----------

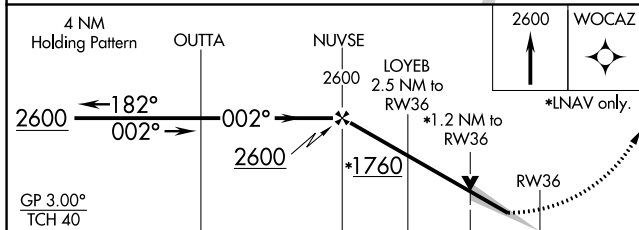

		← 6.1 NM →		← 2.6 NM →		← 1.3 NM →		← 1.2 NM →			
CATEGORY		A		B		C		D			
LPV	DA	1136-1				200 (200-1)					
LNAV/ VNAV	DA	1215-1				279 (300-1)					
LNAV	MDA	1340-1 404 (500-1)				1340-1 $\frac{1}{8}$ 404 (500-1 $\frac{1}{8}$)					
 CIRCLING		1340-1 404 (500-1)		1400-1 464 (500-1)		1580-1 $\frac{3}{4}$ 644 (700-1 $\frac{3}{4}$)		1580-2 644 (700-2)			