

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>69537</b><br><b>W34A</b> | APP CRS<br><b>340°</b> | Rwy Idg <b>3500</b><br>TDZE <b>1482</b><br>Apt Elev <b>1482</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 34

CANDO MUNI (9D7)



▼

NA

DME/DME RNP-0.3 NA. When local altimeter not received, use Devils Lake altimeter setting and increase all DA 63 feet and all MDA 80 feet. Increase LPV visibility 1/8 mile all Cats and LNAV/VNAV visibility 1/4 mile all Cats. Baro-VNAV and VDP NA when using Devils Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (0°F) or above 54°C (130°F).

MISSED APPROACH:  
Climb to 1900 then  
climbing left turn to 3600  
direct CAREW and hold.

|                          |                                          |                        |
|--------------------------|------------------------------------------|------------------------|
| AWOS-3<br><b>118.325</b> | MINNEAPOLIS CENTER<br><b>124.2 270.3</b> | CTAF<br><b>122.9 0</b> |
|--------------------------|------------------------------------------|------------------------|

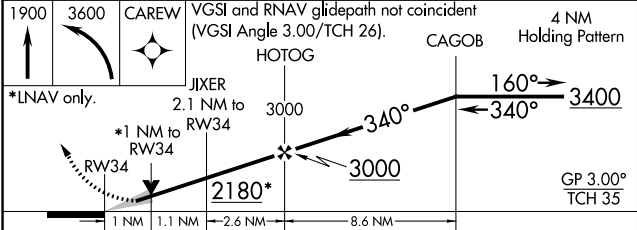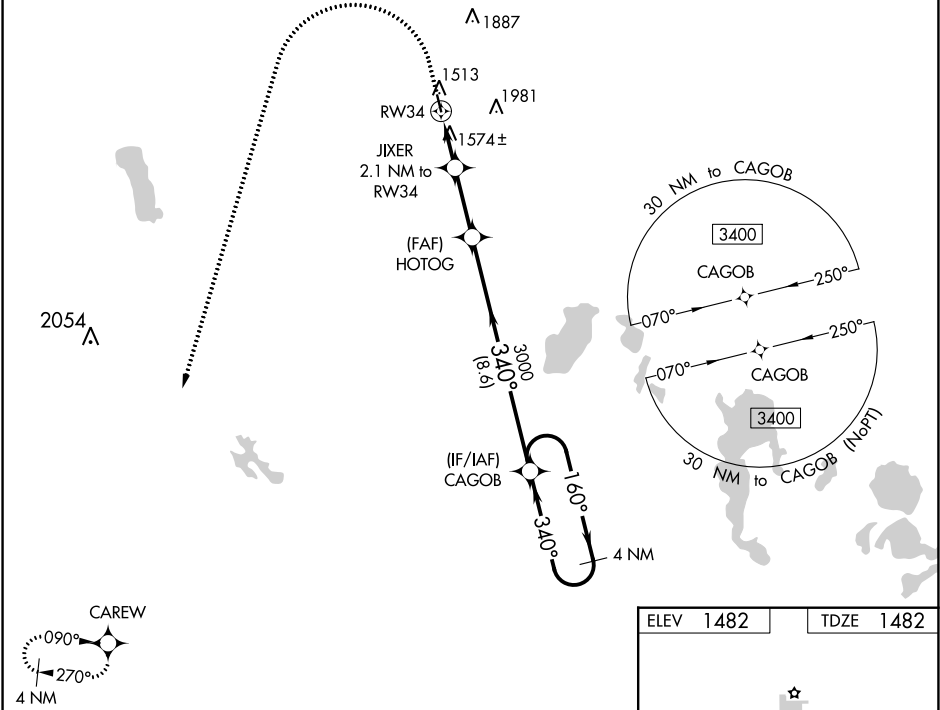

| CATEGORY     | A                     | B                     | C | D  |
|--------------|-----------------------|-----------------------|---|----|
| LPV DA       | 1732-1                | 250 (300-1)           |   | NA |
| LNAV/VNAV DA | 1871-13/8             | 389 (400-13/8)        |   | NA |
| LNAV MDA     | 1840-1                | 358 (400-1)           |   | NA |
| CIRCLING     | 1900-1<br>418 (500-1) | 1940-1<br>458 (500-1) |   | NA |

