

APP CRS	Rwy Idg	13502
233°	TDZE	3606
	Apt Elev	3607

RNAV (GPS) Y RWY 22

RICK HUSBAND AMARILLO INTL (AMA)

RNP APCH.



For inop ALS, increase Cat C/D/E visibility to RVR 6000.

ASR

MALSR

MISSED APPROACH: Climbing left turn to 5400 direct CAUDE and hold.

ATIS	AMARILLO APP CON★	AMARILLO TOWER★	GND CON	CLNC DEL	UNICOM
118.85 350.3	119.5 307.0	118.3(CTAF) 257.9	121.9 348.6	121.65 239.275	122.95

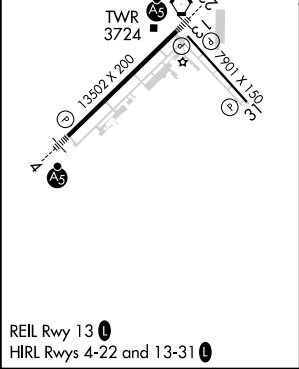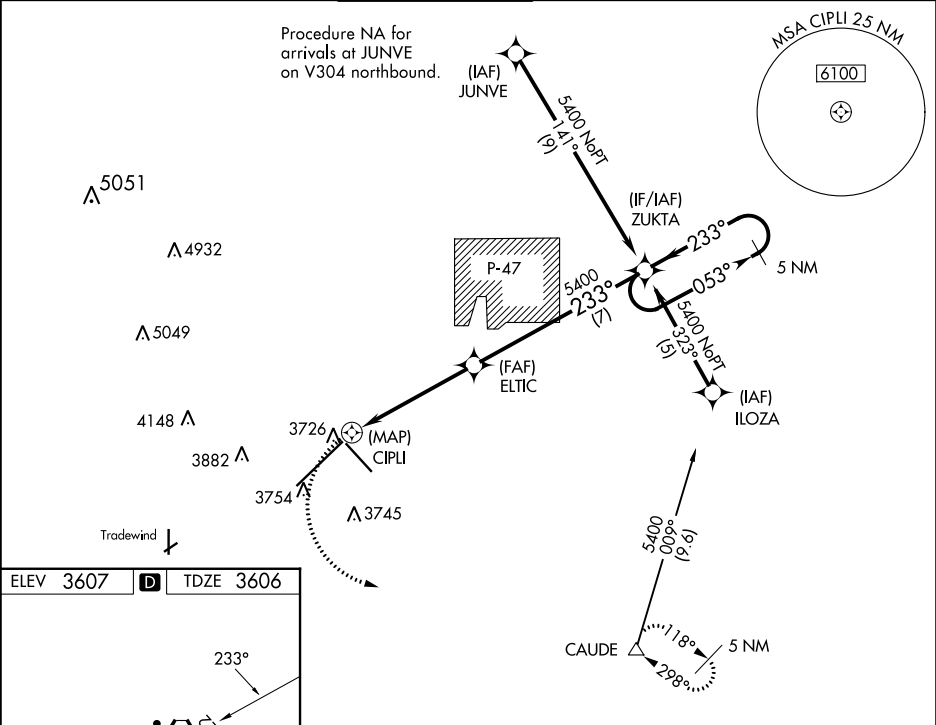

5400 	CAUDE 	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 77).				5 NM Holding Pattern
0.5 0.6 4.4 7 NM CIPLI 0.6 NM to CIPLI 3.00° TCH 50 ELTIC ZUKTA 5400 233° 053° 233° 5400						
CATEGORY	A	B	C	D	E	
LNAV MDA	4020-½	414 (500-½)	4020-¾ 414 (500-¾)	4020-1	414 (500-1)	
 CIRCLING	4080-1	473 (500-1)	4240-1¾ 633 (700-1¾)	4280-2¼ 673 (700-2¼)	4460-3 853 (900-3)	