



24081

RNAV (GPS) RWY 8R
HARTSFIELD-JACKSON ATLANTA INTL (ATL)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C, or above 54°C. Simultaneous approach authorized with Rwy 9L or 9R or 10. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 1500 then climbing left turn to 3500 direct TROYS and hold.

D-ATIS	ATLANTA	ATLANTA TOWER						ALL	GND CON				ALL
ARR 119.65	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS		(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28		RWYS
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4		121.9	121.75	121.65	254.4	
				PRM	126.9								




CLNC DEL 118,1	CPDLC
-----------------------------	-------

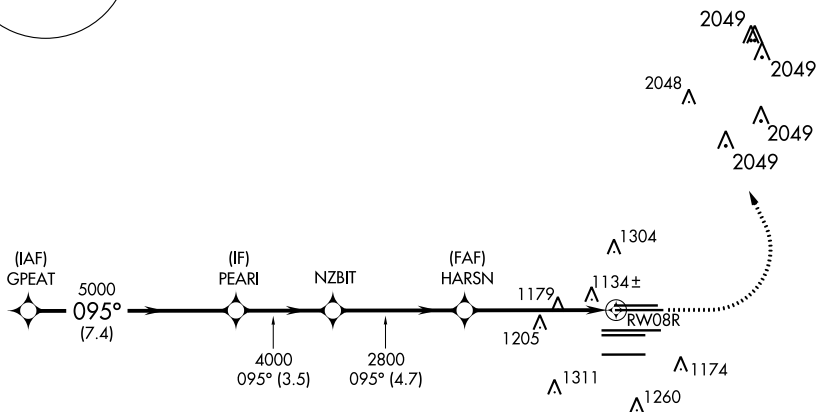


RADAR REQUIRED

ELEV	1026	D	TDZE	1024
------	------	----------	------	------

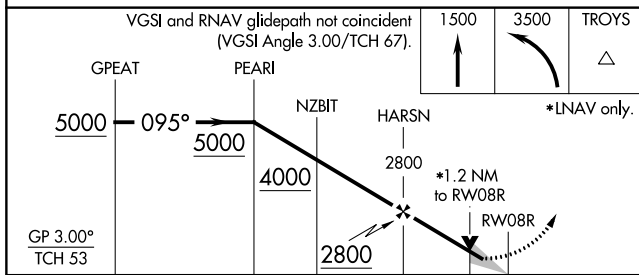

		7.4 NM		3.5 NM		4.7 NM		4.2 NM		1.2	
CATEGORY		A		B		C		D			
LPV	DA			1282/40		258 (300-3/4)					
LNAP/ VNAV	DA			1516-1 ³ / ₈		492 (500-1 ³ / ₈)					
LNAP	MDA	1480/55		456 (500-1)		1480-1 ³ / ₈		456 (500-1 ³ / ₈)			

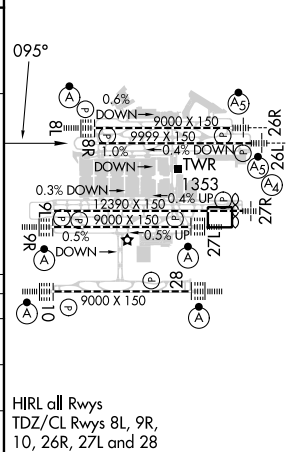HARTSFIELD-JACKSON ATLANTA INTL (ATL)
RNAV (GPS) RWY 8R