


LOC I-SYD 111.3	APP CRS 032°	Rwy ldg 10165 TDZE 5328 Apt Elev 5344
---------------------------	------------------------	--

ILS or LOC RWY 3
CASPER/NATRONA COUNTY INTL (CPR)


DME from DDY VOR/DME. Simultaneous reception of I-SYD and DDY DME required. When local alimeter setting not received, use Douglas alimeter setting and increase DA to 5697 feet and all MDAs 180 feet, increase S-ILS visibility all Cats ¼ SM and S-LOC visibility Cat B, C, D and Circling Cats B, C, D visibility ½ SM, increase MAMUE FIX MINIMUM Circling visibility Cat C ½ SM and Cat D ¼ SM. For inoperative MALSR when using Douglas alimeter setting increase S-ILS visibility all Cats to 1¼ mile. MAMUE FIX MINIMUMS: For inoperative MALSR, increase S-LOC visibility Cats C, and D to 1½ mile. #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR
MISSED APPROACH:
Climb to 7500
then left turn direct
DDY VOR/DME
and hold.

ATIS 126.15	CASPER APP CON ★ 120.65 354.1	CASPER TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------------	-------------------------

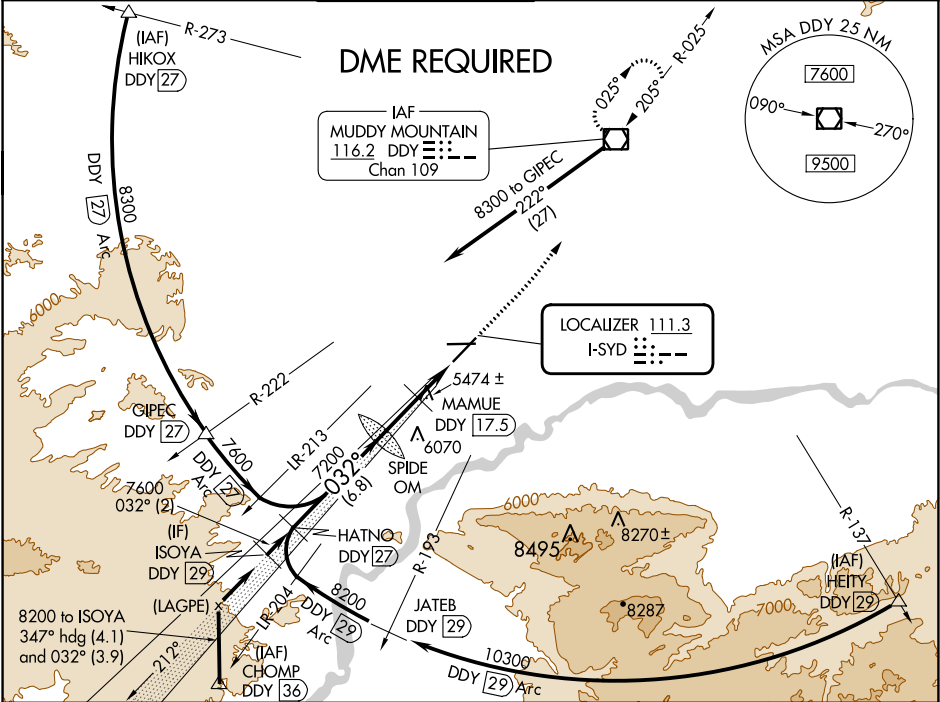

ISOYA DDY 29	*6400 when using Douglas alimeter setting.	7500	DDY
8200	032°	7600	DDY 14.7
7200		7183	*LOC only
GS 3.00° TCH 50	2 NM	6.8 NM	2.9 NM
CATEGORY	A	B	C
S-ILS 3	#5528/24	200 (200-½)	
S-LOC 3	6220/40	892 (900-¾)	6220-2 892 (900-2)
CIRCLING	6220-1¼	876 (900-1¼)	6220-2½ 876 (900-2½) 6220-2¾ 876 (900-2¾)
MAMUE FIX MINIMUMS			
S-LOC 3	5740/24	412 (400-½)	5740/40 412 (400-¾)
CIRCLING	5740-1 396 (400-1)	5800-1 456 (500-1)	5860-1½ 516 (600-1½) 6200-2¾ 856 (900-2¾)

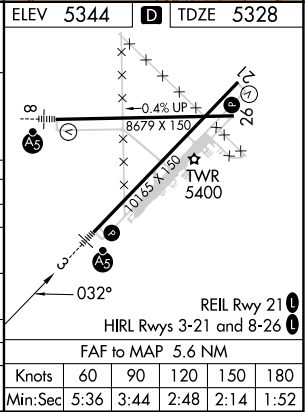

NW-1, 18 APR 2024 to 16 MAY 2024

NW-1, 18 APR 2024 to 16 MAY 2024